

PIE.40-50-60

BASE DO PÉ PEQUENO (40-50-60)



Materiais:

Poliamida reforçada. Resistente a óleos e massas lubrificantes.

Superfície:


Acetinada.

Cor:

Preto (RAL 9011).

Pedidos especiais:

- A pedido e por quantidade, o pé pode ser fornecido na cor de laranja (RAL 2004).

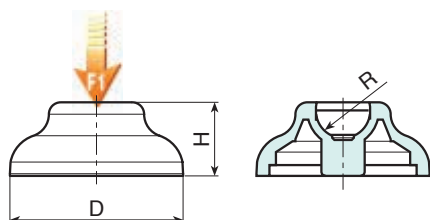

Art.	D	H	R	g	F1 (N)
PIE.040S12.4	40	17	12.4	12	10000
PIE.040S15	40	17	15	12	10000
PIE.050S12.4	50	18	12.4	16	10000
PIE.050S15	50	18	15	16	10000
PIE.060S12.4	60	20	12.4	25	10000
PIE.060S15	60	20	15	24	15000
PIE.060S24	60	20	24	24	15000

PIE. 80-105-130

BASE DO PÉ COM FIXAÇÃO NO CHÃO (80-105-130)



Materiais:

Poliamida reforçada. Resistente a óleos e massas lubrificantes.

Superfície:

Acetinada.

Cor:


Preto (RAL 9011).

Fixação no chão:

O pé é fornecido com os furos para a fixação no chão fechados. Para abri-los, partir a membrana de plástico (ver o desenho).

Pedidos especiais:

- A pedido e por quantidade, o pé pode ser fornecido na cor de laranja (RAL 2004).

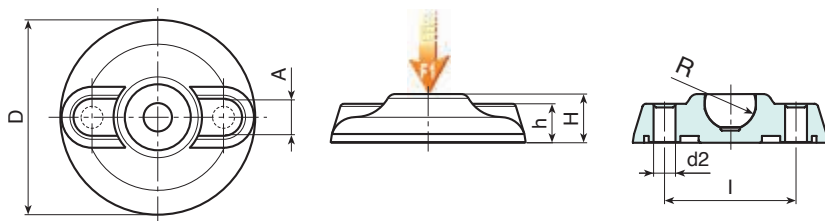

Art.	D	H	h	l	A	d2	R	g	F1 (kN)
PIE.080S12.4	80	20	20	54	16	9 (M8)	12.4	49	10
PIE.080S15	80	20	20	54	16	9 (M8)	15	45	13
PIE.080S24	80	20	20	54	16	9 (M8)	24	47.5	25
PIE.105S15	105	22	21	74	18.5	11 (M10)	15	99	15
PIE.105S24	105	22	21	74	18.5	11 (M10)	24	97	25
PIE.130S15	130	24	21	99	20	13 (M12)	15	165	17
PIE.130S24	130	24	21	99	20	13 (M12)	24	163	25

