# D779

#### Materials:

Reinforced polyamide. Resistant to oils and greases.

Surface finish: Satin.

# Colour:

04

Black (RAL 9011).

# Main insert:

Galvanised steel insert with smooth through bore (tolerance H10).

#### Lateral insert:

Brass insert with threaded through hole.

### Lateral handle:

Revolving handle art. M144 [page ].

## Fixing method:

For fixing systems, or execution of keyways or square holes, please refer to the technical notes attached to the catalogue [page ].

## Special requests:

- Upon request and for a minimum of 50 pieces inserts can be supplied with hole d1 with tolerance H7 and black oxide treated finish. Add letters ZB to the standard code. Example: D77980.TD1101PZB.
- Upon request and for special quantities inserts can be supplied with custom hole diameter d1.
- Upon request and for special quantities inserts can be supplied in different materials/with different coatings.
- Upon request and for special quantities available in the colours indicated in the chart [page ].



UL94


HB

RoHS

COMPLIANT

PA6

+G.F.

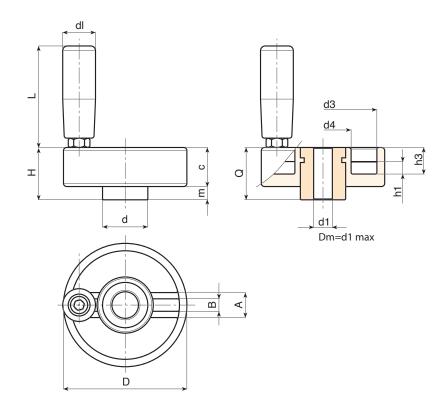

Code	Art.	D	н	d	с	m	h1	h3	Α	В	d3	d4	dl	L	Dm	<b>d1</b> н10	Q	ĝ
D77980.0011	D77980.TP0501P	80	34	29	25	9	8	17	16	7.5	69	36	21	65	20	8	34	285
D77980.0003	D77980.TD1201P	80	34	29	25	9	8	17	16	7.5	69	36	21	65	20	12	34	279

Attention: For a minimum of 50 pieces the diameter d1 can be customised (hole tolerance H10 galvanised and H7 black-oxide treated). Dm = Maximum obtainable diameter for subsequent machining (widening).

