

# H765



## KNURLED HOLLOW HANDWHEEL WITH THREADED THROUGH-HOLE INSERT

### Materials:

Reinforced polyamide.  
Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).

### Inserts:

#### H765:


Brass insert with threaded through hole (thread tolerance 6H).

#### H765PIN:

Stainless steel insert with threaded through hole (Aisi 303) (thread tolerance 6H).

### Special Requests:

- Upon request and for special quantities available in the colours indicated in the chart [page].

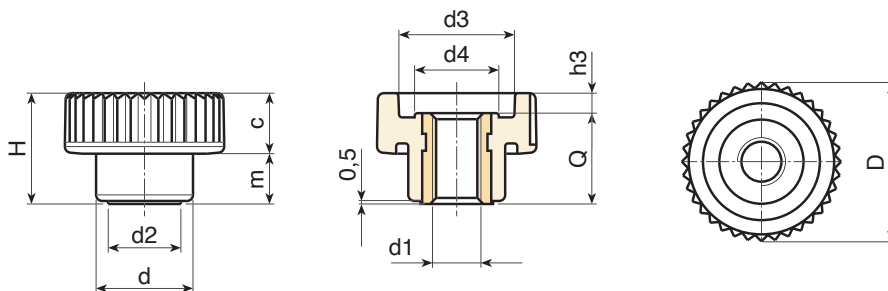

Version H765: brass insert.

| Code        | art.          | D  | H    | d  | m    | c    | d2  | d3 | d4   | h3  | d1 <sub>6H</sub> | Q    | g  |
|-------------|---------------|----|------|----|------|------|-----|----|------|-----|------------------|------|----|
| H76515.0002 | H76515.TM0401 | 15 | 10.5 | 10 | 4.5  | 6    | 8   | 10 | 7.5  | 2   | M4               | 8.5  | 2  |
| H76515.0006 | H76515.TM0501 | 15 | 10.5 | 10 | 4.5  | 6    | 8   | 10 | 7.5  | 2   | M5               | 8.5  | 2  |
| H76521.0002 | H76521.TM0501 | 21 | 15   | 13 | 6.5  | 8.5  | 9.5 | 15 | 10.5 | 2.5 | M5               | 12.5 | 5  |
| H76521.0006 | H76521.TM0601 | 21 | 15   | 13 | 6.5  | 8.5  | 9.5 | 15 | 10.5 | 2.5 | M6               | 12.5 | 5  |
| H76526.0002 | H76526.TM0601 | 26 | 18   | 16 | 8.5  | 9.5  | 12  | 19 | 13   | 3   | M6               | 15   | 10 |
| H76526.0004 | H76526.TM0801 | 26 | 18   | 16 | 8.5  | 9.5  | 12  | 19 | 13   | 3   | M8               | 15   | 10 |
| H76533.0002 | H76533.TM0801 | 32 | 23   | 20 | 10.5 | 12.5 | 15  | 23 | 16   | 5   | M8               | 18   | 16 |
| H76533.0004 | H76533.TM1001 | 32 | 23   | 20 | 10.5 | 12.5 | 15  | 23 | 16   | 5   | M10              | 18   | 16 |
| H76540.0002 | H76540.TM0801 | 40 | 28   | 25 | 12.5 | 15.5 | 18  | 28 | 21   | 6   | M8               | 22   | 31 |
| H76540.0004 | H76540.TM1001 | 40 | 28   | 25 | 12.5 | 15.5 | 18  | 28 | 21   | 6   | M10              | 22   | 32 |
| H76540.0006 | H76540.TM1201 | 40 | 28   | 25 | 12.5 | 15.5 | 18  | 28 | 21   | 6   | M12              | 22   | 32 |
| H76540.0008 | H76540.TM1401 | 40 | 28   | 25 | 12.5 | 15.5 | 18  | 28 | 21   | 6   | M14              | 22   | 34 |

Version H765PIN: stainless steel insert Aisi 303.



| Code        | art.             | D  | H    | d  | m    | c    | d2  | d3 | d4   | h3  | d1 <sub>6H</sub> | Q    | g    |
|-------------|------------------|----|------|----|------|------|-----|----|------|-----|------------------|------|------|
| H76515.0003 | H76515.TM0401PIN | 15 | 10.5 | 10 | 4.5  | 6    | 8   | 10 | 7.5  | 2   | M4               | 8.5  | 3    |
| H76515.0007 | H76515.TM0501PIN | 15 | 10.5 | 10 | 4.5  | 6    | 8   | 10 | 7.5  | 2   | M5               | 8.5  | 3    |
| H76521.0003 | H76521.TM0501PIN | 21 | 15   | 13 | 6.5  | 8.5  | 9.5 | 15 | 10.5 | 2.5 | M5               | 12.5 | 6    |
| H76521.0007 | H76521.TM0601PIN | 21 | 15   | 13 | 6.5  | 8.5  | 9.5 | 15 | 10.5 | 2.5 | M6               | 12.5 | 6    |
| H76526.0003 | H76526.TM0601PIN | 26 | 18   | 16 | 8.5  | 9.5  | 12  | 19 | 13   | 3   | M6               | 15   | 11.5 |
| H76526.0005 | H76526.TM0801PIN | 26 | 18   | 16 | 8.5  | 9.5  | 12  | 19 | 13   | 3   | M8               | 15   | 11.5 |
| H76533.0003 | H76533.TM0801PIN | 32 | 23   | 20 | 10.5 | 12.5 | 15  | 23 | 16   | 5   | M8               | 18   | 18   |
| H76533.0005 | H76533.TM1001PIN | 32 | 23   | 20 | 10.5 | 12.5 | 15  | 23 | 16   | 5   | M10              | 18   | 18   |
| H76540.0003 | H76540.TM0801PIN | 40 | 28   | 25 | 12.5 | 15.5 | 18  | 28 | 21   | 6   | M8               | 22   | 32   |
| H76540.0005 | H76540.TM1001PIN | 40 | 28   | 25 | 12.5 | 15.5 | 18  | 28 | 21   | 6   | M10              | 22   | 31   |
| H76540.0007 | H76540.TM1201PIN | 40 | 28   | 25 | 12.5 | 15.5 | 18  | 28 | 21   | 6   | M12              | 22   | 34   |