

L750

WING NUT WITH INSERT AND FEMALE THREADED HOLE

+135°
-30°

PA6
+G.F.

UL94
HB

RoHS
COMPLIANT

Materials:
Reinforced polyamide.
Resistant to oils and greases.

Surface finish:
Satin.


Colour:
Black (RAL 9011).

Inserts:
L750:
Brass insert with female threaded hole (thread tolerance 6H).

L750CIN:
Stainless steel insert with female threaded hole (Aisi 303) (thread tolerance 6H).

Special Requests:

- Upon request and for special quantities available in the colours indicated in the chart [page 959].

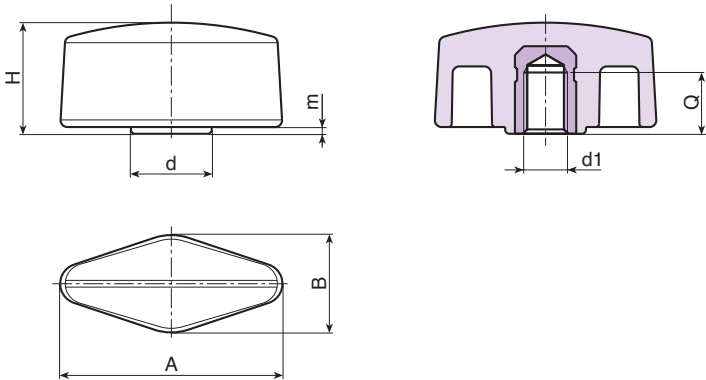

Version L750: brass insert.

Code	Art.	A	B	H	m	d	d1 _{6H}	Q	g
L75032.0001	L75032.TM0501	33	15	16.5	1	12	M5	7	7
L75032.0003	L75032.TM0601	33	15	16.5	1	12	M6	7	6
L75032.0007	L75032.TM0801	33	15	16.5	1	12	M8	7	6
L75048.0001	L75048.TM0601	48	15	16	1	12.5	M6	7	10
L75048.0002	L75048.TM0801	48	15	16	1	12.5	M8	7	10

Version L750CIN: stainless steel insert (Aisi 303).

Code	Art.	A	B	H	m	d	d1 _{6H}	Q	g
L75032.0002	L75032.TM0501CIN	33	15	16.5	1	12	M5	7	9
L75032.0004	L75032.TM0601CIN	33	15	16.5	1	12	M6	7	8
L75032.0008	L75032.TM0801CIN	33	15	16.5	1	12	M8	7	8
L75048.0003	L75048.TM0801CIN	48	15	16	1	12.5	M8	7	8

INOX