

O432

FLAT HINGE WITH THREADED STUD AND THREADED HOLE INSERT

+135°
-30°

PA6
+G.F.

UL94
HB

RoHS
COMPLIANT


Materials:
Reinforced polyamide.
Resistant to oils and greases.

Surface finish:
Satin.


Colour:
Black (RAL 9011).

Inserts:
Galvanised steel pin.
Brass insert with female threaded hole (thread tolerance 6H).
Galvanised steel threaded stud (thread tolerance 6g).

- Special Requests:**
- Upon request and for special quantities inserts can be supplied in different materials.
 - Upon request and for special quantities available in the colours indicated in the chart [page 959].

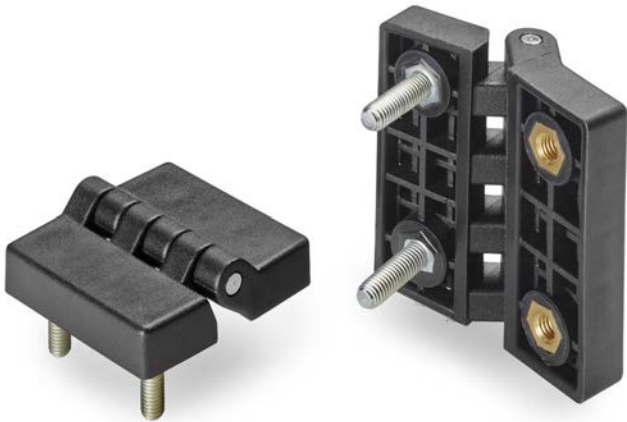

15

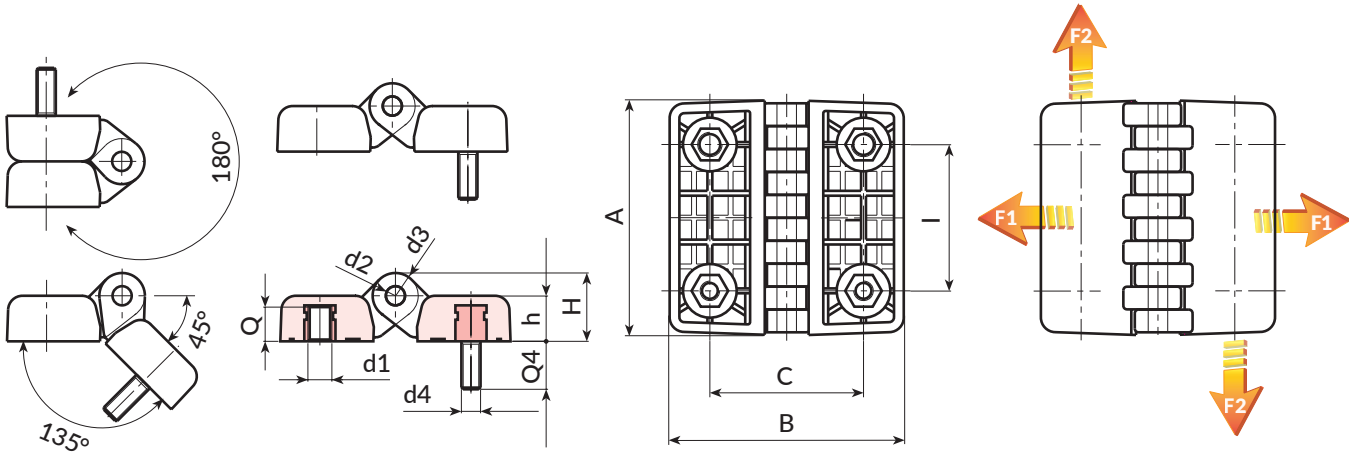

Code	art.	l	C	A	B	h	H	d2	d3	d1-d4	Q	Q4	g	F1(N)	F2(N)
O43230.0001	O43230.TM0501	30	30	48	48	10.5	15.5	5	10	M05	7	15	40	1850	1350
O43230.0002	O43230.TM0601	30	30	48	48	10.5	15.5	5	10	M06	7	15	41	1850	1350
O43240.0001	O43240.TM0601	40	40	64	64	13	19	5	12	M06	8,5	20	73	4000	1600
O43240.0002	O43240.TM0801	40	40	64	64	13	19	5	12	M08	8,5	20	85	4000	1600
O43260.0001	O43260.TM0801	60	63	96	96	19	28.5	8	19	M08	14	20	240	3100	1400
O43260.0003	O43260.TM1001	60	63	96	96	19	28.5	8	19	M10	14	20	250	3100	1400