

# P907



## SMALL MOUNTING FOOT WITH STEEL ARTICULATED STEM TYPE B - BALL 15

### Materials:

Reinforced polyamide.  
Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:


Black (RAL 9011).

### Inserts:

Galvanised steel threaded and articulated stem (ball 15) with milled seat for wrench (type B) (thread tolerance 6g).

### Special requests:

- Upon request and for special quantities inserts can be supplied with customised lengths.
- Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).

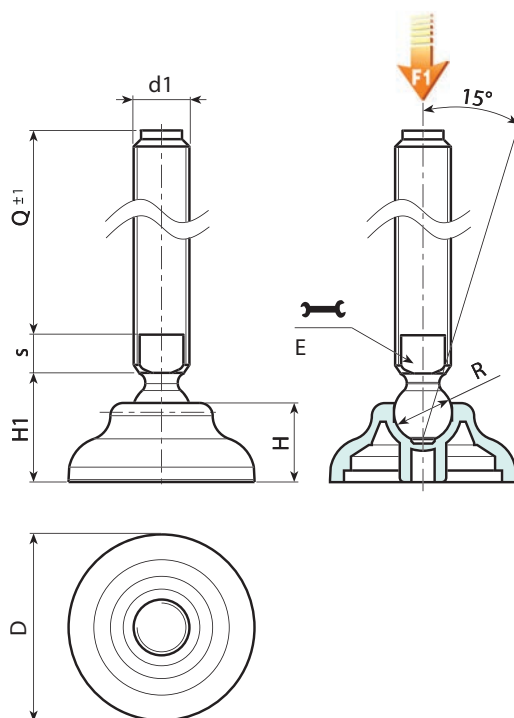

Version P907: Mounting foot with stem type B (with milled seat for wrench) and ball 15

| Code        | Art.              | D  | H  | H1 | E  | s | R  | d1 <sub>6g</sub> | Q   |  | F1 (kN) |
|-------------|-------------------|----|----|----|----|---|----|------------------|-----|---------------------------------------------------------------------------------------|---------|
| P90760.0007 | P90760.TM20X5001  | 60 | 20 | 26 | 16 | 7 | 15 | M20              | 50  | 145                                                                                   | 13      |
| P90760.0008 | P90760.TM20X7001  | 60 | 20 | 26 | 16 | 7 | 15 | M20              | 70  | 185                                                                                   | 13      |
| P90760.0009 | P90760.TM20X9001  | 60 | 20 | 26 | 16 | 7 | 15 | M20              | 90  | 225                                                                                   | 13      |
| P90760.0001 | P90760.TM20X11001 | 60 | 20 | 26 | 16 | 7 | 15 | M20              | 110 | 267                                                                                   | 13      |
| P90760.0002 | P90760.TM20X13001 | 60 | 20 | 26 | 16 | 7 | 15 | M20              | 130 | 306                                                                                   | 13      |
| P90760.0003 | P90760.TM20X15001 | 60 | 20 | 26 | 16 | 7 | 15 | M20              | 150 | 346                                                                                   | 13      |
| P90760.0004 | P90760.TM20X17001 | 60 | 20 | 26 | 16 | 7 | 15 | M20              | 170 | 386                                                                                   | 13      |
| P90760.0005 | P90760.TM20X19001 | 60 | 20 | 26 | 16 | 7 | 15 | M20              | 190 | 426                                                                                   | 13      |
| P90760.0006 | P90760.TM20X21001 | 60 | 20 | 26 | 16 | 7 | 15 | M20              | 210 | 466                                                                                   | 13      |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.

