

# T416



## FERRITE ROUND DISC MAGNET WITH GALVANISED STEEL SHELL AND THREADED STUD

### Materials:

- (1) Turned free-cutting steel shell with threaded stud (thread tolerance 6g).
- (2) Flat ferrite magnet.
- (3) Plastic spacer.

### Surface finish:


Smooth.

### Colour:

Standard blue galvanising.

### Special requests:

- Upon request and for special quantities the steel shell of model T416 can be supplied black galvanised (720h salt spray resistance).

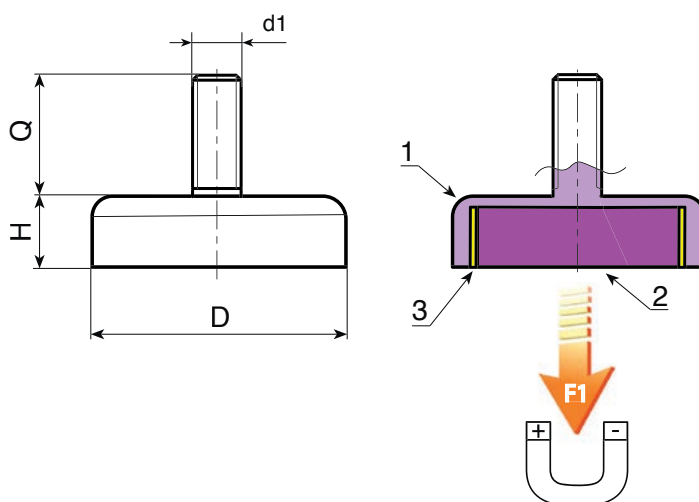

| Code         | art.             | D           | H±0,2 | d16g | Q±0,5 | g   | F1(N) |
|--------------|------------------|-------------|-------|------|-------|-----|-------|
| T416010.0001 | T416010.VZM03X07 | 10±0,1      | 4,5   | M3   | 07    | 2   | 4     |
| T416013.0001 | T416013.VZM03X07 | 13±0,1      | 4,5   | M3   | 07    | 3   | 10    |
| T416016.0001 | T416016.VZM03X07 | 16±0,1      | 4,5   | M3   | 07    | 5   | 18    |
| T416016.0002 | T416016.VZM04X06 | 16±0,1      | 4,5   | M4   | 06    | 5   | 18    |
| T416020.0001 | T416020.VZM03X07 | 20±0,1      | 6     | M3   | 07    | 10  | 30    |
| T416020.0002 | T416020.VZM06X30 | 20±0,1      | 6     | M6   | 30    | 15  | 30    |
| T416025.0001 | T416025.VZM04X08 | 25±0,1      | 7     | M4   | 08    | 19  | 40    |
| T416025.0002 | T416025.VZM05X15 | 25±0,1      | 7     | M5   | 15    | 20  | 40    |
| T416025.0003 | T416025.VZM06X20 | 25±0,1      | 7     | M6   | 20    | 22  | 40    |
| T416032.0001 | T416032.VZM04X08 | 32±0,1      | 7     | M4   | 08    | 30  | 80    |
| T416032.0002 | T416032.VZM06X12 | 32±0,1      | 7     | M6   | 12    | 31  | 80    |
| T416032.0003 | T416032.VZM08X10 | 32±0,1      | 7     | M8   | 10    | 32  | 80    |
| T416047.0001 | T416047.VZM06X08 | 47+0,2/-0,1 | 9     | M6   | 08    | 85  | 180   |
| T416057.0001 | T416057.VZM06X08 | 57+0,3/-0,1 | 10,5  | M6   | 08    | 146 | 280   |
| T416063.0001 | T416063.VZM06X15 | 63+0,3/-0,1 | 14    | M6   | 15    | 233 | 350   |