

H759

KNURLED HANDWHEEL WITH HUB AND THREADED STUD

+135°
-30°

PA6
+G.F.

UL94
HB

RoHS
COMPLIANT


Materials:
Reinforced polyamide.
Resistant to oils and greases.

Surface finish:
Satin.

Colour:
Black (RAL 9011).

Inserts:
Galvanised steel threaded stud (thread tolerance 6g).

- Special Requests:**
- Upon request and for special quantities inserts can be supplied with customised lengths.
 - Upon request and for special quantities inserts can be supplied in different materials.
 - Upon request and for special quantities available in the colours indicated in the chart [page].

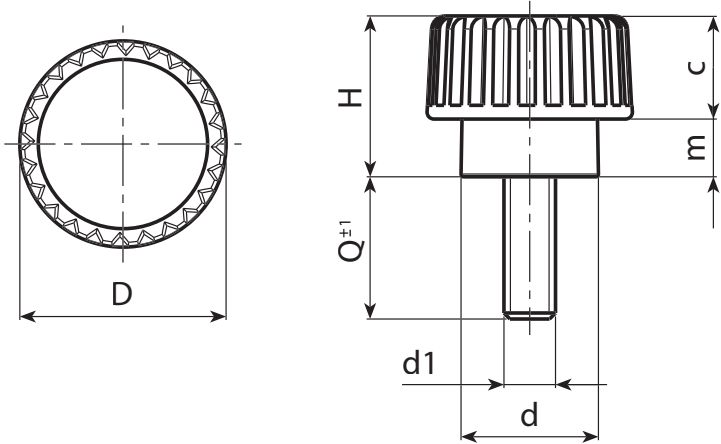

Code	art.	D	H	d	m	c	LM	d1 _{6g}	Q	g
-	H75915.TM03X1101	15	11,5	10,5	4	7,5	70	M3	11	3
-	H75915.TM03X2401	15	11,5	10,5	4	7,5	70	M3	24	3,5
-	H75915.TM04X1001	15	11,5	10,5	4	7,5	70	M4	10	3,5
-	H75915.TM04X2001	15	11,5	10,5	4	7,5	70	M4	20	4
-	H75915.TM04X3001	15	11,5	10,5	4	7,5	70	M4	30	4,5
-	H75915.TM05X1001	15	11,5	10,5	4	7,5	70	M5	10	4
-	H75915.TM05X1601	15	11,5	10,5	4	7,5	70	M5	16	4,5
-	H75915.TM05X2001	15	11,5	10,5	4	7,5	70	M5	20	5,5
-	H75915.TM05X3001	15	11,5	10,5	4	7,5	70	M5	30	6,5
-	H75915.TM06X1001	15	11,5	10,5	4	7,5	70	M6	10	5
-	H75915.TM06X1601	15	11,5	10,5	4	7,5	70	M6	16	6
-	H75915.TM06X2001	15	11,5	10,5	4	7,5	70	M6	20	7,5

LM = maximum mouldable length.
Threaded stud length on request, with a minimum quantity of 250 pieces.