

H760

KNURLED HANDWHEEL WITH THREADED STUD

+135°
-30°

PA6
+G.F.

UL94
HB

RoHS
COMPLIANT


Materials:
Reinforced polyamide.
Resistant to oils and greases.

Surface finish:
Satin.

Colour:
Black (RAL 9011).

Inserts:
Galvanised steel threaded stud (thread tolerance 6g).

- Special Requests:**
- Upon request and for special quantities inserts can be supplied with customised lengths.
 - Upon request and for special quantities inserts can be supplied in different materials.
 - Upon request and for special quantities available in the colours indicated in the chart [page].

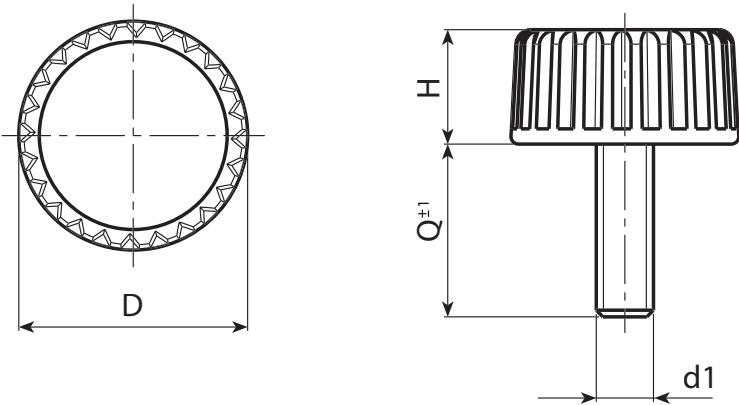

Code	art.	D	H	LM	d1 _{6g}	Q	g
H76015.0004	H76015.TM04X1301	15	8	77	M4	13	2
H76015.0005	H76015.TM04X1501	15	8	77	M4	15	2
H76015.0009	H76015.TM04X1901	15	8	77	M4	19	2,5
H76015.0012	H76015.TM04X2401	15	8	77	M4	24	3
H76015.0021	H76015.TM05X1501	15	8	77	M5	15	4
H76015.0026	H76015.TM05X1901	15	8	77	M5	19	4,5
H76015.0027	H76015.TM05X2401	15	8	77	M5	24	5
H76015.0029	H76015.TM05X2901	15	8	77	M5	29	5,5
H76015.0035	H76015.TM06X1501	15	8	77	M6	15	5,5
H76015.0039	H76015.TM06X1901	15	8	77	M6	19	6,5
H76015.0042	H76015.TM06X2401	15	8	77	M6	24	7
H76015.0043	H76015.TM06X2901	15	8	77	M6	29	7,5

LM = maximum mouldable length.
Threaded stud length on request, with a minimum quantity of 250 pieces.