

O400

HINGE WITH THROUGH HOLES



Materials:

Reinforced polyamide.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

Galvanised steel pin.

Hole:

Version TS:

Through hole obtained by moulding the plastic. Seat for countersunk screw DIN 7991 / UNI 5933.

Version TC:


Through hole obtained by moulding the plastic. Seat for cylindrical head screw DIN 912 / UNI 5931.

Special Requests:



- Upon request and for special quantities available in the colours indicated in the chart [page].



Ver. TS



Ver. TC

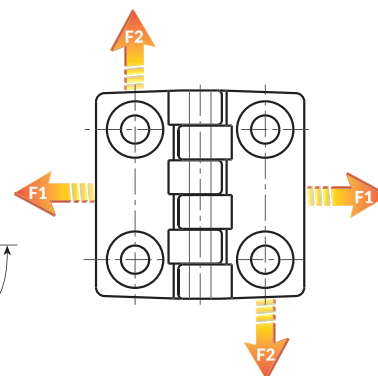

Version O400-TS: with holes for countersunk head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	g	F1 (N)	F2 (N)
O40020.0003	O40020.TG04.501TS	20	20	32	32	7	10,5	8,5	3	7	4,5	9	1440	490
O40030.0003	O40030.TG05.501TS	30	30	48	48	10,5	15,5	12,5	5	10	5,5	27	1960	1470
O40030.0007	O40030.TG06.501TS	30	30	48	48	10,5	15,5	12,5	5	10	6,5	27	1960	1470
O40040.0004	O40040.TG06.501TS	40	40	64	64	13	19	12,5	5	12	6,5	53	2850	1520
O40060.0003	O40060.TG08.501TS	60	63	96	96	16	24	16,5	8	16	8,5	152	4300	1810
O40060.0007	O40060.TG10.501TS	60	63	96	96	16	24	20,5	8	16	10,5	152	4300	1810

Version O400-TC: with holes for cylindrical head screws

Code	art.	I	C	A	B	h	H	D	d2	d3	d1	g	F1 (N)	F2 (N)
O40020.0001	O40020.TG04.501TC	20	20	32	32	7	10,5	7,5	3	7	4,5	9	1440	490
O40030.0001	O40030.TG05.501TC	30	30	48	48	10,5	15,5	10,5	5	10	5,5	27	1960	1470
O40030.0005	O40030.TG06.501TC	30	30	48	48	10,5	15,5	10,5	5	10	6,5	27	1960	1470
O40040.0002	O40040.TG06.501TC	40	40	64	64	13	19	10,5	5	12	6,5	53	2850	1520
O40060.0001	O40060.TG08.501TC	60	63	96	96	16	24	13,5	8	16	8,5	152	4300	1810
O40060.0005	O40060.TG10.501TC	60	63	96	96	16	24	16,5	8	16	10,5	152	4300	1810

