

O505



ASYMMETRICAL FLAT ZAMAK HINGE WITH THREADED STUD

Materials:

(1) Die-cast zamak alloy (zinc, aluminium and copper alloy).

Surface finish:

Colour:





(01) Black epoxy powder coated (RAL 9011).
(Z) Standard blue galvanising.

Inserts:

(2) Galvanised steel threaded stud (thread tolerance 6g).
(3) Stainless steel hinge pivot pin (Aisi 304).

Special Requests:

- None.

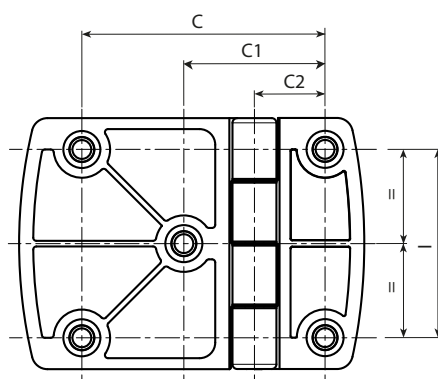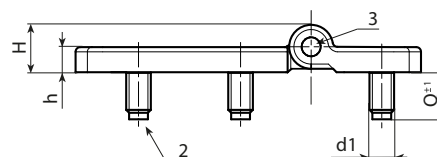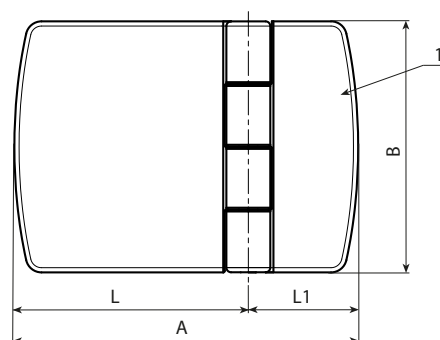

Black coated version code 01 ending.

Code	Art.	C2	C1	C	I	A	B	L1	L	h	H	d1 _{6g}	Q	g
O505077.0001	O505077.ZM08X1401	22,5	45	77,5	60	110	80	35	75	8	15	M8	15	387

Galvanised version code Z ending.

Code	Art.	C2	C1	C	I	A	B	L1	L	h	H	d1 _{6g}	Q	g
O505077.0002	O505077.ZM08X14Z	22,5	45	77,5	60	110	80	35	75	8	15	M8	15	387

