

P335

SHAPED ANTI-VIBRATION MOUNT WITH MALE AND FEMALE THREAD



Materials:

Natural rubber (NR),

Rubber hardness:

Hardness 55 Shore A (tolerance $\pm 5\%$).

Surface finish:

Smooth.

Colour:


Black (RAL 9011).

Inserts:

- (1) Galvanised boron steel threaded stud (thread tolerance 6g).
- (2) Galvanised weldable steel washer.
- (3) Galvanised boron steel insert with female threaded hole (thread tolerance 6H).

Special requests:

- Upon request and for a minimum quantity of 100 pieces anti-vibration mounts can be supplied with hardness 45 or 70 Shore A.
- Upon request and for a minimum quantity of 100 pieces anti-vibration mounts can be supplied in different materials:
- P336= SBR
- P337= NBR
- P338= EPDM

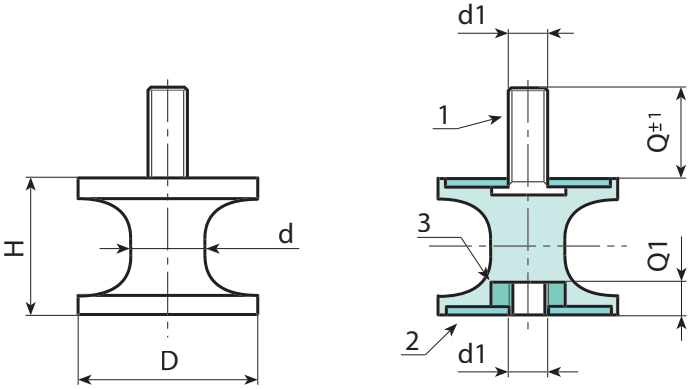

Code	Art.	D	H	d	d1 _{6g/6H}	Q	Q1
P335020.0001	P335020.F1510M06X55	20	15	7	M6	16	6
P335025.0001	P335025.F2010M06X55	25	20	10	M6	18	6
P335025.0002	P335025.F2017M06X55	25	20	10	M6	18	6
P335030.0001	P335030.F2020M08X55	30	20	17	M8	23	8
P335040.0001	P335040.F3019M08X55	40	30	19	M8	23	8
P335040.0002	P335040.F3027M08X55	40	30	27	M8	23	8
P335040.0004	P335040.F4835M08X55	40	48	35	M8	23	8
P335050.0001	P335050.F3028M10X55	50	30	28	M10	28	10
P335080.0001	P335080.F6060M12X55	80	60	60	M12	37	12