

P541



FULL STEEL MOUNTING FOOT WITH ARTICULATED STEM TYPE A - BALL 15 AND NON-SLIP BASE

Materials:

P541:

Turned free-cutting steel mounting foot base.

P541CIN:

Turned stainless steel mounting foot base (Aisi 303).

Surface finish:

Smooth.

Colour:

Standard blue galvanising.

P541:

Standard blue galvanising.

P541CIN:

Natural.

Inserts:

P541:

Galvanised steel threaded and articulated stem (ball 15) with hexagonal base (thread tolerance 6g).

P541CIN:

Stainless steel threaded and articulated stem (ball 15) with hexagonal base (Aisi 303) (thread tolerance 6g).


Stem fixing method:

The stem cannot be disassembled. The ball cannot be removed as the edge of its seat has been pressed in.

Non-slip base:

Non-slip base in thermoplastic rubber SBS 75 Shore, black RAL 9011.

Resistant to oils and greases. Push-fit assembly.

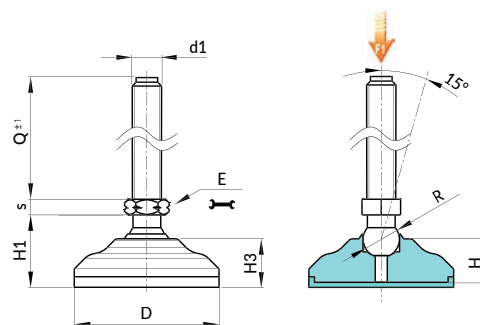

Special requests:

- Upon request and for special quantities inserts can be supplied with customised lengths.

Version P541: Galvanised steel mounting foot with stem type A (with hexagonal base) and ball 15 - with SBS non-slip base

16	Code	Art.	D	H	H1	H3	E	s	R	d1 _{6g}	Q	g _g	F1 (kN)
-	P54140.VZM12X50		40	15	26	17.5	16	6.5	15	M12	50	170	33
-	P54140.VZM12X70		40	15	26	17.5	16	6.5	15	M12	70	183	33
-	P54140.VZM12X90		40	15	26	17.5	16	6.5	15	M12	90	198	33
P54140.0022	P54140.VZM12X110		40	15	26	17.5	16	6.5	15	M12	110	214	33
-	P54140.VZM14X50		40	15	26	17.5	16	6.5	15	M14	50	182	33
-	P54140.VZM14X70		40	15	26	17.5	16	6.5	15	M14	70	202	33
-	P54140.VZM14X90		40	15	26	17.5	16	6.5	15	M14	90	223	33
P54140.0026	P54140.VZM14X110		40	15	26	17.5	16	6.5	15	M14	110	240	33
P54140.0027	P54140.VZM14X130		40	15	26	17.5	16	6.5	15	M14	130	258	33
P54140.0028	P54140.VZM14X150		40	15	26	17.5	16	6.5	15	M14	150	274	33
-	P54140.VZM16X50		40	15	26	17.5	16	6.5	15	M16	50	198	50
-	P54140.VZM16X70		40	15	26	17.5	16	6.5	15	M16	70	224	50
-	P54140.VZM16X90		40	15	26	17.5	16	6.5	15	M16	90	250	50
P54140.0032	P54140.VZM16X110		40	15	26	17.5	16	6.5	15	M16	110	275	50
P54140.0033	P54140.VZM16X130		40	15	26	17.5	16	6.5	15	M16	130	301	50
P54140.0034	P54140.VZM16X150		40	15	26	17.5	16	6.5	15	M16	150	326	50
P54140.0035	P54140.VZM16X170		40	15	26	17.5	16	6.5	15	M16	170	354	50
P54140.0036	P54140.VZM16X190		40	15	26	17.5	16	6.5	15	M16	190	377	50
-	P54150.VZM12X50		50	17.5	29.5	20	16	6.5	15	M12	50	239	33
P54150.0022	P54150.VZM12X70		50	17.5	29.5	20	16	6.5	15	M12	70	252	33
-	P54150.VZM12X90		50	17.5	29.5	20	16	6.5	15	M12	90	267	33
P54150.0021	P54150.VZM12X110		50	17.5	29.5	20	16	6.5	15	M12	110	283	33
-	P54150.VZM14X50		50	17.5	29.5	20	16	6.5	15	M14	50	251	33
-	P54150.VZM14X70		50	17.5	29.5	20	16	6.5	15	M14	70	271	33
-	P54150.VZM14X90		50	17.5	29.5	20	16	6.5	15	M14	90	292	33
P54150.0026	P54150.VZM14X110		50	17.5	29.5	20	16	6.5	15	M14	110	309	33
P54150.0027	P54150.VZM14X130		50	17.5	29.5	20	16	6.5	15	M14	130	326	33
P54150.0028	P54150.VZM14X150		50	17.5	29.5	20	16	6.5	15	M14	150	343	33
-	P54150.VZM16X50		50	17.5	29.5	20	16	6.5	15	M16	50	267	50
-	P54150.VZM16X70		50	17.5	29.5	20	16	6.5	15	M16	70	293	50
-	P54150.VZM16X90		50	17.5	29.5	20	16	6.5	15	M16	90	319	50
P54150.0032	P54150.VZM16X110		50	17.5	29.5	20	16	6.5	15	M16	110	344	50
P54150.0033	P54150.VZM16X130		50	17.5	29.5	20	16	6.5	15	M16	130	370	50
P54150.0034	P54150.VZM16X150		50	17.5	29.5	20	16	6.5	15	M16	150	395	50
P54150.0035	P54150.VZM16X170		50	17.5	29.5	20	16	6.5	15	M16	170	423	50
P54150.0036	P54150.VZM16X190		50	17.5	29.5	20	16	6.5	15	M16	190	446	50
-	P54160.VZM12X50		60	19.5	32	22	16	6.5	15	M12	50	339	33
-	P54160.VZM12X70		60	19.5	32	22	16	6.5	15	M12	70	352	33
-	P54160.VZM12X90		60	19.5	32	22	16	6.5	15	M12	90	367	33
P54160.0022	P54160.VZM12X110		60	19.5	32	22	16	6.5	15	M12	110	383	33

P541



Code	Art.	D	H	H1	H3	E	s	R	d1 _{6g}	Q	g	F1 (kN)
-	P54160.VZM14X50	60	19.5	32	22	16	6.5	15	M14	50	351	33
-	P54160.VZM14X70	60	19.5	32	22	16	6.5	15	M14	70	371	33
-	P54160.VZM14X90	60	19.5	32	22	16	6.5	15	M14	90	392	33
P54160.0026	P54160.VZM14X110	60	19.5	32	22	16	6.5	15	M14	110	409	33
P54160.0027	P54160.VZM14X130	60	19.5	32	22	16	6.5	15	M14	130	426	33
P54160.0028	P54160.VZM14X150	60	19.5	32	22	16	6.5	15	M14	150	443	33
-	P54160.VZM16X50	60	19.5	32	22	16	6.5	15	M16	50	367	50
-	P54160.VZM16X70	60	19.5	32	22	16	6.5	15	M16	70	393	50
-	P54160.VZM16X90	60	19.5	32	22	16	6.5	15	M16	90	419	50
P54160.0032	P54160.VZM16X110	60	19.5	32	22	16	6.5	15	M16	110	444	50
P54160.0033	P54160.VZM16X130	60	19.5	32	22	16	6.5	15	M16	130	470	50
P54160.0034	P54160.VZM16X150	60	19.5	32	22	16	6.5	15	M16	150	495	50
P54160.0035	P54160.VZM16X170	60	19.5	32	22	16	6.5	15	M16	170	523	50
P54160.0036	P54160.VZM16X190	60	19.5	32	22	16	6.5	15	M16	190	546	50

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.

INOX

Version P541CIN: Stainless steel mounting foot with stem type A (with hexagonal base) and ball 15 - with SBS non-slip base

Code	Art.	D	H	H1	H3	E	s	R	d1 _{6g}	Q	g	F1 (kN)
-	P54140.INM12X50CIN	40	15	26	17.5	16	6.5	15	M12	50	170	33
-	P54140.INM12X70CIN	40	15	26	17.5	16	6.5	15	M12	70	183	33
-	P54140.INM12X90CIN	40	15	26	17.5	16	6.5	15	M12	90	198	33
P54140.0004	P54140.INM12X110CIN	40	15	26	17.5	16	6.5	15	M12	110	214	33
-	P54140.INM14X50CIN	40	15	26	17.5	16	6.5	15	M14	50	182	33
-	P54140.INM14X70CIN	40	15	26	17.5	16	6.5	15	M14	70	202	33
-	P54140.INM14X90CIN	40	15	26	17.5	16	6.5	15	M14	90	223	33
P54140.0008	P54140.INM14X110CIN	40	15	26	17.5	16	6.5	15	M14	110	240	33
P54140.0009	P54140.INM14X130CIN	40	15	26	17.5	16	6.5	15	M14	130	258	33
P54140.0010	P54140.INM14X150CIN	40	15	26	17.5	16	6.5	15	M14	150	274	33
-	P54140.INM16X50CIN	40	15	26	17.5	16	6.5	15	M16	50	198	50
-	P54140.INM16X70CIN	40	15	26	17.5	16	6.5	15	M16	70	224	50
-	P54140.INM16X90CIN	40	15	26	17.5	16	6.5	15	M16	90	250	50
P54140.0014	P54140.INM16X110CIN	40	15	26	17.5	16	6.5	15	M16	110	275	50
P54140.0015	P54140.INM16X130CIN	40	15	26	17.5	16	6.5	15	M16	130	301	50
P54140.0016	P54140.INM16X150CIN	40	15	26	17.5	16	6.5	15	M16	150	326	50
P54140.0017	P54140.INM16X170CIN	40	15	26	17.5	16	6.5	15	M16	170	354	50
P54140.0018	P54140.INM16X190CIN	40	15	26	17.5	16	6.5	15	M16	190	377	50
-	P54150.INM12X50CIN	50	17.5	29.5	20	16	6.5	15	M12	50	239	33
P54150.0004	P54150.INM12X70CIN	50	17.5	29.5	20	16	6.5	15	M12	70	252	33
-	P54150.INM12X90CIN	50	17.5	29.5	20	16	6.5	15	M12	90	267	33
P54150.0003	P54150.INM12X110CIN	50	17.5	29.5	20	16	6.5	15	M12	110	283	33
-	P54150.INM14X50CIN	50	17.5	29.5	20	16	6.5	15	M14	50	251	33
-	P54150.INM14X70CIN	50	17.5	29.5	20	16	6.5	15	M14	70	271	33
-	P54150.INM14X90CIN	50	17.5	29.5	20	16	6.5	15	M14	90	292	33
P54150.0008	P54150.INM14X110CIN	50	17.5	29.5	20	16	6.5	15	M14	110	309	33
P54150.0009	P54150.INM14X130CIN	50	17.5	29.5	20	16	6.5	15	M14	130	326	33
P54150.0010	P54150.INM14X150CIN	50	17.5	29.5	20	16	6.5	15	M14	150	343	33
-	P54150.INM16X50CIN	50	17.5	29.5	20	16	6.5	15	M16	50	267	50
-	P54150.INM16X70CIN	50	17.5	29.5	20	16	6.5	15	M16	70	293	50
-	P54150.INM16X90CIN	50	17.5	29.5	20	16	6.5	15	M16	90	319	50
P54150.0014	P54150.INM16X110CIN	50	17.5	29.5	20	16	6.5	15	M16	110	344	50
P54150.0015	P54150.INM16X130CIN	50	17.5	29.5	20	16	6.5	15	M16	130	370	50
P54150.0016	P54150.INM16X150CIN	50	17.5	29.5	20	16	6.5	15	M16	150	395	50
P54150.0017	P54150.INM16X170CIN	50	17.5	29.5	20	16	6.5	15	M16	170	423	50
P54150.0018	P54150.INM16X190CIN	50	17.5	29.5	20	16	6.5	15	M16	190	446	50
-	P54160.INM12X50CIN	60	19.5	32	22	16	6.5	15	M12	50	339	33
-	P54160.INM12X70CIN	60	19.5	32	22	16	6.5	15	M12	70	352	33
-	P54160.INM12X90CIN	60	19.5	32	22	16	6.5	15	M12	90	367	33
P54160.0004	P54160.INM12X110CIN	60	19.5	32	22	16	6.5	15	M12	110	383	33
-	P54160.INM14X50CIN	60	19.5	32	22	16	6.5	15	M14	50	351	33
-	P54160.INM14X70CIN	60	19.5	32	22	16	6.5	15	M14	70	371	33
-	P54160.INM14X90CIN	60	19.5	32	22	16	6.5	15	M14	90	392	33
P54160.0008	P54160.INM14X110CIN	60	19.5	32	22	16	6.5	15	M14	110	409	33
P54160.0009	P54160.INM14X130CIN	60	19.5	32	22	16	6.5	15	M14	130	426	33
P54160.0010	P54160.INM14X150CIN	60	19.5	32	22	16	6.5	15	M14	150	443	33
-	P54160.INM16X50CIN	60	19.5	32	22	16	6.5	15	M16	50	367	50
-	P54160.INM16X70CIN	60	19.5	32	22	16	6.5	15	M16	70	393	50
-	P54160.INM16X90CIN	60	19.5	32	22	16	6.5	15	M16	90	419	50
P54160.0014	P54160.INM16X110CIN	60	19.5	32	22	16	6.5	15	M16	110	444	50
P54160.0015	P54160.INM16X130CIN	60	19.5	32	22	16	6.5	15	M16	130	470	50
P54160.0016	P54160.INM16X150CIN	60	19.5	32	22	16	6.5	15	M16	150	495	50
P54160.0017	P54160.INM16X170CIN	60	19.5	32	22	16	6.5	15	M16	170	523	50
P54160.0018	P54160.INM16X190CIN	60	19.5	32	22	16	6.5	15	M16	190	546	50

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.

Customised stud length available for a minimum of 100 pieces.

