

# P700



## TEARDROP MOUNTING FOOT WITH GROUND FIXING AND STEEL ARTICULATED STEM TYPE A - BALL 12.4

### Materials:

Reinforced polyamide.  
Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).

### Inserts:

#### P700:

Galvanised steel threaded and articulated stem (ball 12.4) with hexagonal base (thread tolerance 6g).

#### P700CIN:


Stainless steel threaded and articulated stem (ball 12.4) with hexagonal base (Aisi 303) (thread tolerance 6g).

### Ground fixing:

Through hole obtained by moulding the plastic.

### Special requests:

- Upon request and for special quantities inserts can be supplied with customised lengths.
- Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).

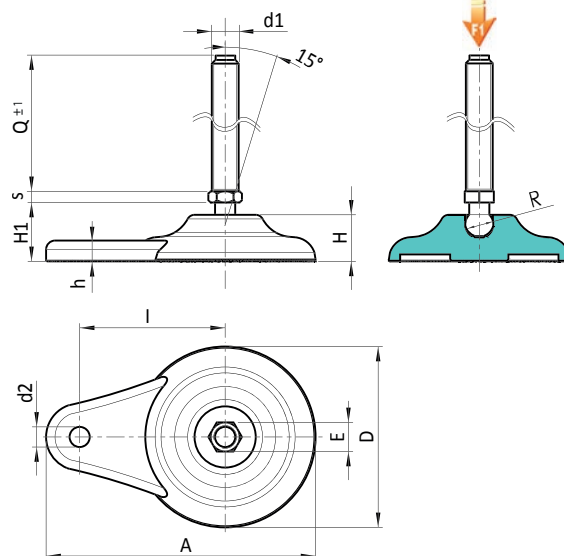

Version P700: Teardrop mounting foot with ground fixing - stem type A (with hexagonal base) and ball 12.5

| Code         | Art.               | D  | H  | I  | H1 | h | A   | E  | s | d2 | R    | d1  | Q   | g   | F1 (kN) |
|--------------|--------------------|----|----|----|----|---|-----|----|---|----|------|-----|-----|-----|---------|
| -            | P700080.TM08X04501 | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M8  | 45  | 58  | 10      |
| P700080.0001 | P700080.TM08X07001 | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M8  | 70  | 65  | 10      |
| P700080.0002 | P700080.TM10X04501 | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M10 | 45  | 83  | 10      |
| P700080.0004 | P700080.TM10X07001 | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M10 | 70  | 95  | 10      |
| P700080.0006 | P700080.TM10X10001 | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M10 | 100 | 132 | 10      |
| P700080.0008 | P700080.TM12X04501 | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M12 | 45  | 93  | 10      |
| P700080.0010 | P700080.TM12X07001 | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M12 | 70  | 110 | 10      |
| P700080.0012 | P700080.TM12X10001 | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M12 | 100 | 154 | 10      |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.

Version P700CIN: Teardrop mounting foot with ground fixing - stem type A - stainless steel - (with hexagonal base) and ball 12.5

INOX

| Code         | Art.                  | D  | H  | I  | H1 | h | A   | E  | s | d2 | R    | d1  | Q   | g   | F1 (kN) |
|--------------|-----------------------|----|----|----|----|---|-----|----|---|----|------|-----|-----|-----|---------|
| -            | P700080.TM08X04501CIN | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M8  | 45  | 58  | 10      |
| -            | P700080.TM08X07001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M8  | 70  | 65  | 10      |
| P700080.0003 | P700080.TM10X04501CIN | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M10 | 45  | 83  | 10      |
| P700080.0005 | P700080.TM10X07001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M10 | 70  | 95  | 10      |
| P700080.0007 | P700080.TM10X10001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M10 | 100 | 132 | 10      |
| P700080.0009 | P700080.TM12X04501CIN | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M12 | 45  | 93  | 10      |
| P700080.0011 | P700080.TM12X07001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M12 | 70  | 110 | 10      |
| P700080.0013 | P700080.TM12X10001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 13 | 5 | 9  | 12.5 | M12 | 100 | 154 | 10      |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.

