

# P702



## TEARDROP MOUNTING FOOT WITH GROUND FIXING AND STEEL ARTICULATED STEM TYPE A - BALL 15

### Materials:

Reinforced polyamide.  
Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).

### Inserts:

#### P702:

Galvanised steel threaded and articulated stem (ball 15) with hexagonal base (thread tolerance 6g).

#### P702CIN:


Stainless steel threaded and articulated stem (ball 15) with hexagonal base (Aisi 303) (thread tolerance 6g).

### Ground fixing:

Through hole obtained by moulding the plastic.

### Special requests:

- Upon request and for special quantities inserts can be supplied with customised lengths.
- Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).

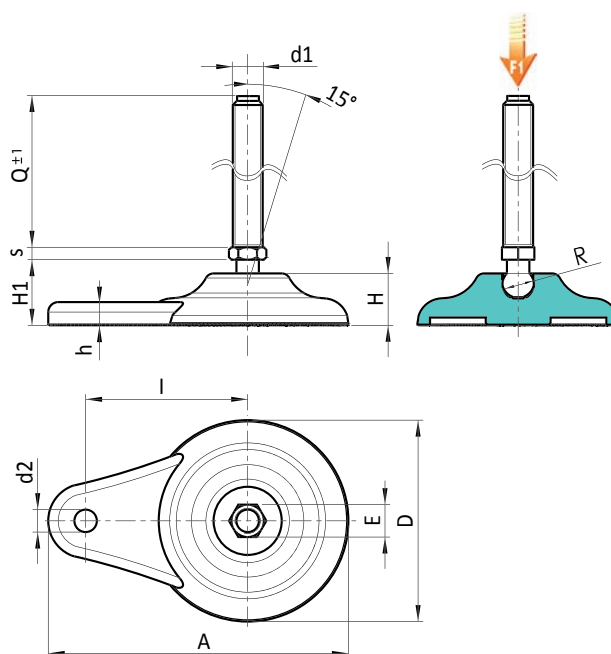

Version P702: Teardrop mounting foot with ground fixing - stem type A (with hexagonal base) and ball 15

| Code         | Art.               | D  | H  | I  | H1 | h | A   | E  | s   | d2 | R  | d1 <sub>6g</sub> | Q   | g   | F1 (kN) |
|--------------|--------------------|----|----|----|----|---|-----|----|-----|----|----|------------------|-----|-----|---------|
| -            | P702080.TM12X5001  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M12              | 50  | 120 | 13      |
| -            | P702080.TM12X7001  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M12              | 70  | 133 | 13      |
| -            | P702080.TM12X9001  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M12              | 90  | 148 | 13      |
| P702080.0006 | P702080.TM12X11001 | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M12              | 110 | 164 | 13      |
| -            | P702080.TM14X5001  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M14              | 50  | 132 | 13      |
| -            | P702080.TM14X7001  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M14              | 70  | 152 | 13      |
| -            | P702080.TM14X9001  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M14              | 90  | 173 | 13      |
| P702080.0012 | P702080.TM14X11001 | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M14              | 110 | 190 | 13      |
| P702080.0015 | P702080.TM14X15001 | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M14              | 150 | 224 | 13      |
| -            | P702080.TM16X5001  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 50  | 148 | 13      |
| -            | P702080.TM16X7001  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 70  | 174 | 13      |
| -            | P702080.TM16X9001  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 90  | 200 | 13      |
| P702080.0024 | P702080.TM16X11001 | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 110 | 225 | 13      |
| P702080.0026 | P702080.TM16X13001 | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 130 | 251 | 13      |
| P702080.0028 | P702080.TM16X15001 | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 150 | 276 | 13      |
| P702080.0030 | P702080.TM16X17001 | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 170 | 304 | 13      |
| P702080.0032 | P702080.TM16X19001 | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 190 | 327 | 13      |


Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.



# P702



## TEARDROP MOUNTING FOOT WITH GROUND FIXING AND STEEL ARTICULATED STEM TYPE A - BALL 15

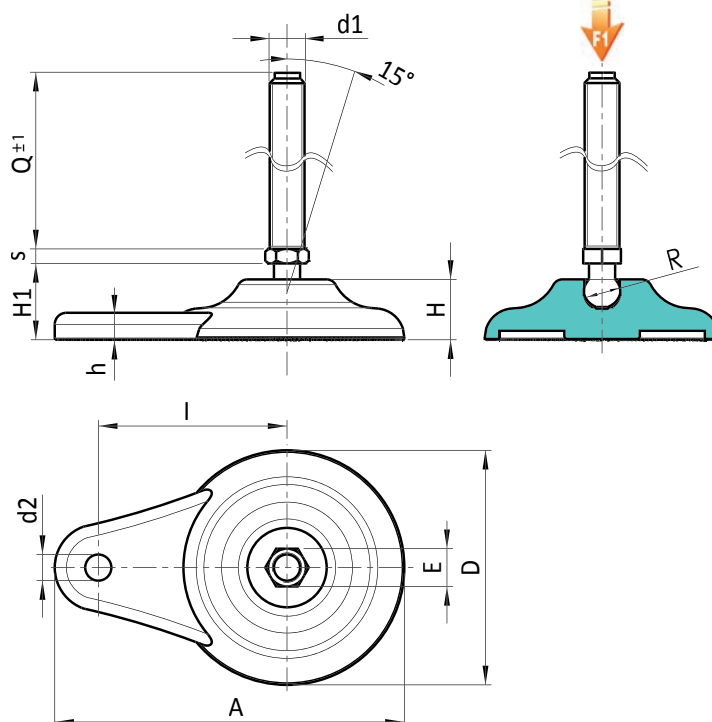

16

Version P702CIN: Teardrop mounting foot with ground fixing - stem type A - stainless steel - (with hexagonal base) and ball 15

INOX

| Code         | Art.                  | D  | H  | I  | H1 | h | A   | E  | s   | d2 | R  | d1 <sub>6g</sub> | Q   | F1 (kN) |
|--------------|-----------------------|----|----|----|----|---|-----|----|-----|----|----|------------------|-----|---------|
| -            | P702080.TM12X7001CIN  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M12              | 70  | 133     |
| -            | P702080.TM12X9001CIN  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M12              | 90  | 148     |
| P702080.0007 | P702080.TM12X11001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M12              | 110 | 164     |
| -            | P702080.TM14X7001CIN  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M14              | 70  | 152     |
| P702080.0013 | P702080.TM14X11001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M14              | 110 | 190     |
| P702080.0014 | P702080.TM14X13001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M14              | 130 | 207     |
| -            | P702080.TM16X5001CIN  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 50  | 148     |
| -            | P702080.TM16X7001CIN  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 70  | 174     |
| -            | P702080.TM16X9001CIN  | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 90  | 200     |
| P702080.0025 | P702080.TM16X11001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 110 | 225     |
| P702080.0027 | P702080.TM16X13001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 130 | 251     |
| P702080.0029 | P702080.TM16X15001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 150 | 276     |
| P702080.0031 | P702080.TM16X17001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 170 | 304     |
| P702080.0033 | P702080.TM16X19001CIN | 80 | 20 | 65 | 26 | 9 | 120 | 16 | 6.5 | 9  | 15 | M16              | 190 | 327     |

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.  
Customised stud length available for a minimum of 100 pieces.

