

# P830



## MOUNTING FOOT WITH BALL JOINT (24), HEXAGONAL BASE AND THREADED HOLE

### Materials:

Reinforced polyamide.  
Resistant to oils and greases.

### Surface finish:

Satin.

### Colour:

Black (RAL 9011).

### Inserts:

#### P830:


Galvanised steel ball joint with threaded hole (ball R.24) with hexagonal base (thread tolerance 6H).

#### P830CIN:

Stainless steel (Aisi 303) ball joint with threaded hole (ball R.24) with hexagonal base (thread tolerance 6H).

### Special requests:

- Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).

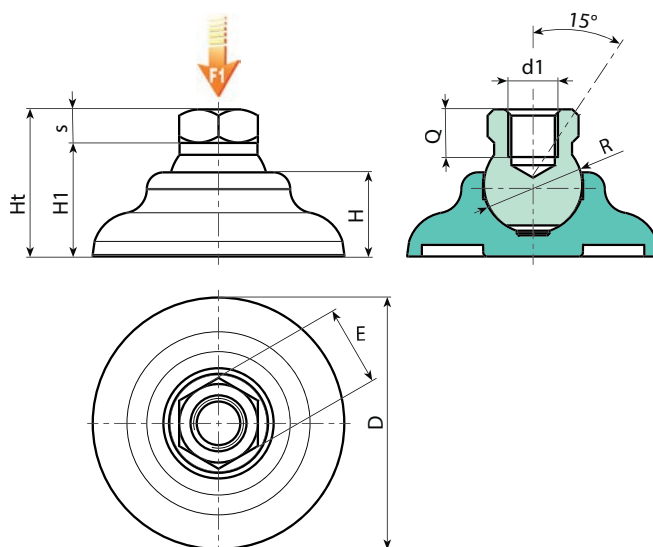

16

Version P830: with galvanised steel insert

Code	Art.	D	H	H1	Ht	E	s	R	d1 <sub>6H</sub>	Q		F1 (kN)
P830060.0001	P830060.TM1201	60	20	27,5	35,5	19	8	24	M12	11,5	85	17
P830060.0003	P830060.TM1601	60	20	27,5	35,5	24	8	24	M16	11,5	85	17

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.

Version P830CIN: with stainless steel insert (Aisi 303)

Code	Art.	D	H	H1	Ht	E	s	R	d1 <sub>6H</sub>	Q		F1 (kN)
P830060.0002	P830060.TM1201CIN	60	20	27,5	35,5	19	8	24	M12	11,5	85	17
P830060.0004	P830060.TM1601CIN	60	20	27,5	35,5	24	8	24	M16	11,5	85	17

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.

INOX

