

R200



WHEEL WITH POLYAMIDE BODY AND INJECTED POLYURETHANE TREAD (WITHOUT RIG)

Materials:

Wheel body:

Polyamide. Resistant to oils and greases.

Tread:

Injected polyurethane. Hardness 60 ± 5 Shore D.

Surface finish:

Smooth.

Colour:

Body:

Natural white.

Tread:




Red (Ral 3013).

Wheel rotation:

The hole for the pivot pin is formed by plastic moulding.

Special requests:

- Upon request and for a minimum of 20 pieces, the wheel can be supplied with a needle roller cage, (replace code no. R200 with code no. R230).

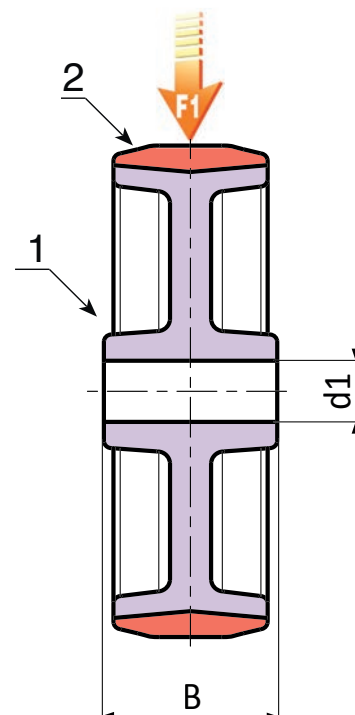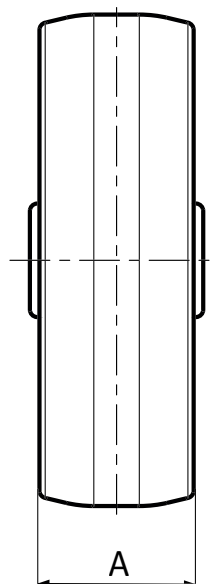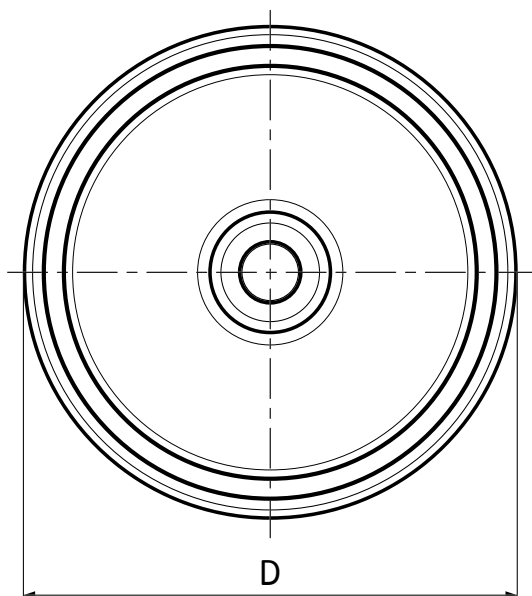

18

Code	art.	D	A	B	d1	$\bar{g}$	F1 (Kg)
R200080.0001	R200080.T30D12	80	30	40	12	104	100
R200100.0001	R200100.T30D12	100	30	40	12	152	130
R200125.0001	R200125.T35D15	125	35	44	15	254	200
R200150.0001	R200150.T40D15	150	40	44	15	229	250
R200200.0001	R200200.T50D20	200	50	58	20	818	365