

R250



WHEEL WITH POLYAMIDE BODY AND INJECTED POLYURETHANE TREAD WITH BALL BEARINGS WITHOUT RIG (HEAVY DUTY SERIES)

Materials:
Wheel body:
Polyamide. Resistant to oils and greases.
Tread:
Injected polyurethane. Hardness 60 ± 5 Shore D.


Surface finish:
Smooth.

Colour:
Body:
Natural white.
Tread:
Red (Ral 3013).

Wheel rotation:
(1) A pair of steel ball bearings is inserted in the wheel hub to provide excellent rollability under a heavy load.

Special requests:

- Upon request and for a minimum of 20 pieces, the wheel can be supplied with a needle roller cage, (replace code no. R250 with code no. R240).

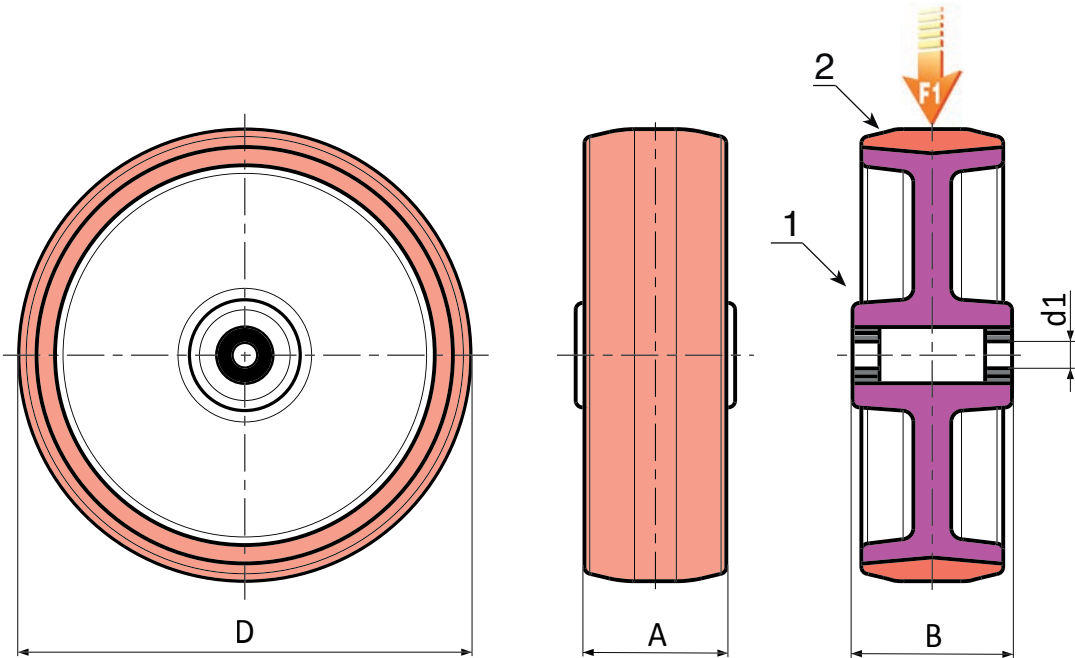

Code	art.	D	A	B	d1	g	F1 (Kg)
R250080.0001	R250080.T34D12	80	34	40	12	-	260
R250100.0001	R250100.T40D15	100	40	44	15	-	300
-	R250125.T40D15	125	40	45	15	-	400
R250150.0001	R250150.T45D20	150	45	58	20	-	600
R250200.0001	R250200.T50D20	200	50	58	20	-	750