S111 FEMALE CONNECTOR FOR WELDING MACHINE PANEL



Phenolic resin. Resistant to oils and greases. Resistant to high temperatures.

Surface finish: Glossy.

Colour: (RAL 9011). Black

Inserts:

(1) Brass insert with female connector EN 60794:12. (4) F25-00: Black-oxyde treated steel toothed washer DIN 6798. (4) F35-00:

Black-oxyde treated steel corrugated washer DIN 137. (4) F70-95:

Black-oxyde treated steel corrugated washer DIN 137. (5) Yellow passivated steel threaded hexagon ring nut.

(6) Black-oxide treated steel split washer UNI 1751.

(7) Yellow passivated steel washer. (8) Yellow passivated hex head screw DIN933/UNI 5739.

Special Requests:

• None.



+170° || -20°O


PF


UL94

HB





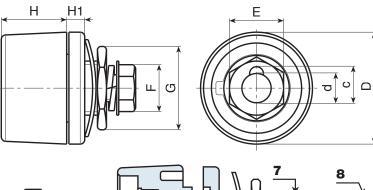

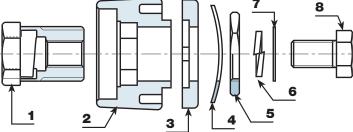

Code	art.	D	н	H1	d	с	Е	F	G	ĝ	Amp. Max
S111.0001	S111.F2500	33	14	4	9	11	14	13	22	50	200
S111.0008	S111.F3550	50.5	29	7	13	16	21	17	27	153	400
S111.0010	S111.F7095	50.5	29	7	13	16	24	19	32	202	500



19