

01

## “EUROMODEL” INDEXED CLAMPING LEVER MADE FROM ANTIBACTERIAL MATERIAL AND STAINLESS STEEL THREADED INSERT

Leve a scatto con vite

Notes: The addition of a special antibacterial additive, based on inorganic silver ions, make these products naturally resistant to microbes, bacteria and fungi, by preventing their formation and diffusion. The ions are released slowly, ensuring resistance over a long period even if subjected to frequent washing and sanitising. These ions remain intact at well over 200°C, and therefore suitable for resisting sterilization which normally occurs around 130°C. The material has been certified by credited laboratories and a declaration of conformity will be issued for every item delivered. The proposed formulation complies with ISO 22196:2011 standard and in particular relates to the following strains: • Escherichia Coli ATCC 25922 • Candida Albicans ATCC 10231 • Pseudomonas aeruginosa ATCC 13388 • Pseudomonas aeruginosa ATCC 15442 • Klebsiella pneumoniae ATCC 4352 • Staphylococcus aureus ATCC 6538. For all the tests the comparative reduction percentage ranges between 99.5% and 99.9%.

### Materials:

Special technopolymer reinforced with high-strength glass fibre, with inorganic silver ion additives which make the material antibacterial (ISO 22196:2011).

Resistant to oils and greases.

### Surface finish:

Satin.

### Lever body and insert colour:

Black (RAL 9011).

### Inserts:

Stainless steel insert with female threaded hole (Aisi 303) (thread tolerance 6H).

### Fixing screw:

Stainless steel screw (Aisi 303) with slotted head.


### Spring:

Stainless steel spring (Aisi 302).

### Special requests:

None.



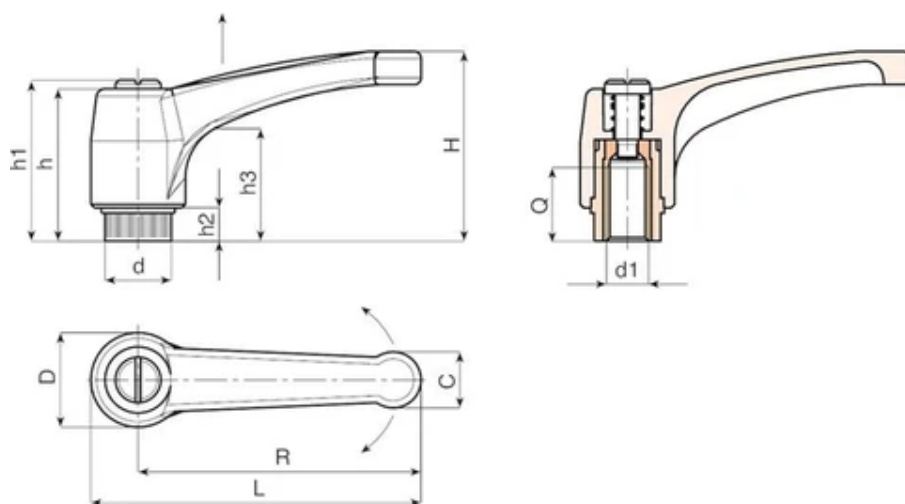

| Code         | Art.             | L   | R  | H  | D  | d  | c    | h  | h1 | h2  | h3 | d16H | Q  | Weight (g) |
|--------------|------------------|-----|----|----|----|----|------|----|----|-----|----|------|----|------------|
| A580065.0002 | A580065.TM0601BF | 76  | 65 | 43 | 23 | 15 | 13   | 36 | 40 | 8   | 24 | M6   | 14 | 36         |
| A580080.0002 | A580080.TM0801BF | 93  | 80 | 54 | 27 | 19 | 15.5 | 44 | 48 | 8.5 | 29 | M8   | 19 | 55         |
| A580094.0004 | A580094.TM1001BF | 109 | 94 | 56 | 30 | 19 | 18   | 45 | 49 | 9   | 30 | M10  | 19 | 81         |