

F278



06

6-LOBE HANDWHEEL WITH STEEL HUB AND THREADED STUD

Volantini a 6 lobi

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

F278:

Galvanised steel insert with threaded stud (thread tolerance 6g).

F278CIN:


Stainless steel insert with threaded stud (Aisi 303) (thread tolerance 6g).

Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.

Upon request and for special quantities available in the colours indicated in the chart (attention: reduced range).



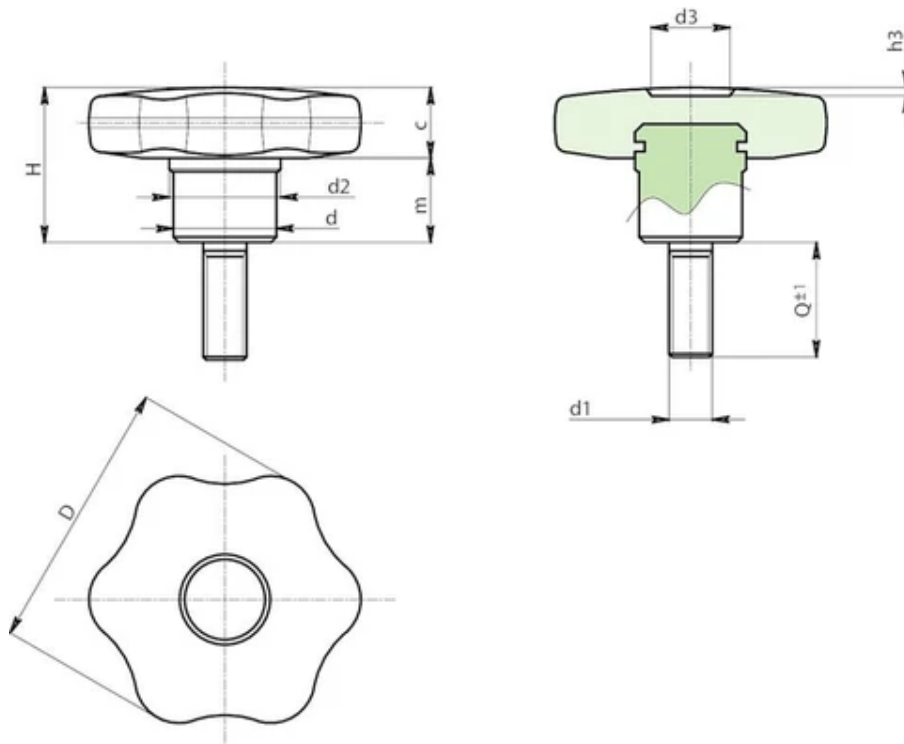

Version F278: Galvanised steel hub.

Code	Art.	D	d	d2	d3	H	h3	m	c	d1 6g	Q	LM	Weight (g)
F27840.0002	F27840.TM08X3001	40	15	17	11	24	6	12	12	M8	30	55	54
F27850.0002	F27850.TM10X4001	50	18	20	13	29	7	15	14	M10	40	60	96
F27860.0001	F27860.TM12X4001	60	20	24	16	34	6	18	16	M12	40	60	-

LM = Maximum mouldable length.

Customised stud lengths available for a minimum of 150 pieces.

Art.	D	H	d	c	m	d3	h3	LM	d1 6g	Q	Weight (g)
F27830.TM06X..01	30	22	13	11	11	8	4	45	M6	A.R.	-
F27840.TM08X3001	40	24	15	12	12	11	6	55	M8	30	54
F27850.TM10X4001	50	29	18	14	15	13	7	60	M10	40	96
F27860.TM12X4001	60	34	20	16	18	16	6	60	M12	40	-

Version F278 CIN: Stainless steel hub (Aisi 303).

Code	Art.	D	d	d2	d3	H	h3	m	c	d1 6g	Q	LM	Weight (g)
F27840.0003	F27840.TM08X3001CIN	40	15	17	11	24	6	12	12	M8	30	45	54
F27850.0003	F27850.TM10X4001CIN	50	18	20	13	29	7	15	14	M10	40	50	-
F27860.0002	F27860.TM12X4001CIN	60	20	24	16	34	6	18	16	M12	40	50	-

Customised stud lengths available for a minimum of 150 pieces.

LM = Maximum mouldable length.

Art.	D	H	d	c	m	d3	h3	LM	d1 6g	Q	Weight (g)
F27830.TM06X..01CIN	30	22	13	11	11	8	4	35	M6	A.R.	-
F27840.TM08X3001CIN	40	24	15	12	12	11	6	45	M8	30	54
F27850.TM10X4001CIN	50	29	18	14	15	13	7	50	M10	40	-
F27860.TM12X4001CIN	60	34	20	16	18	16	6	50	M12	40	-