

07

4 LOBE HANDWHEEL WITH INDEXED INSERT (PUSH TO USE) AND MALE THREAD

Volantini a 4 lobi

Materials:

(3-4) Special high resistance glass fiber reinforced technopolymer.
Resistant to oils and greases.

Surface finish:

Satin.

Colour:

(3-4) Black. (RAL 9011).

Central fixing button:

(1) Red polyamide button (RAL 3000 code 16).



Alternative handwheel and button colour:

Orange	(RAL 2004 code 02).
Blue	(RAL 5015 code 07).
Yellow	(RAL 1021 code 10).
Red	(RAL 3000 code 16).
Green	(RAL 6024 code 17).
Grey	(RAL 7035 cod. 13).
Black	(RAL 9001 code 01).

Inserts:

Galvanised steel threaded stud (thread tolerance 6g).

Spring:


Stainless steel spring (Aisi 302).

Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.

Upon request and for special quantities inserts can be supplied in different materials.

Upon request and for special quantities available in the colours indicated in the chart.

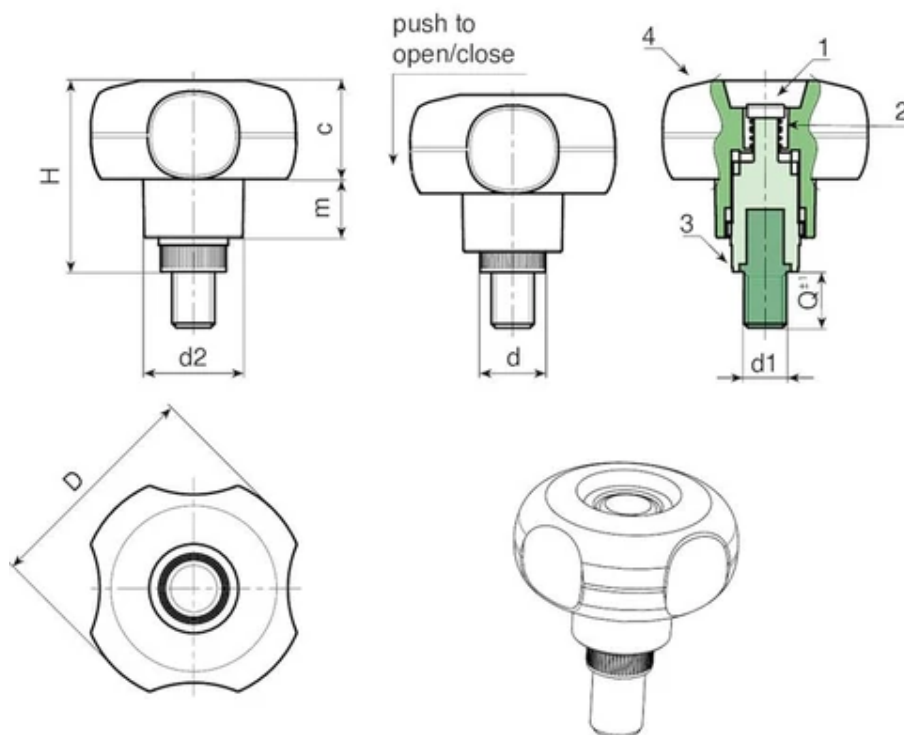

Code	art.	D	H	d2	d	m	c	LM	d16g	Q	Weight (g)
G63250.0002	G63250.TM06X300116	49	42.5	22	15	13	22	90	M6	30	-
G63250.0005	G63250.TM08X400116	49	42.5	22	15	13	22	90	M8	40	-
G63250.0007	G63250.TM10X500116	49	42.5	22	15	13	22	90	M10	50	-

LM = Maximum mouldable length.

Threaded stud length on request, with a minimum quantity of 250 pieces.