

UNIVERSAL QUARTER TURN ZAMAK CAM LOCK, M19 THREAD WITH KNOB AND HOLE FOR PADLOCK

Serrature 1/4 giro M19

Materials:

- (1-4) Die-cast zamak lock body M19 (stator), rotor and knob.
- (2) Zamak locking pawl. If pressed, the lock rotates idle. It is possible to insert the bow of a padlock (maximum diameter: 7.5 mm).
- (3) Steel cam (E=0 straight, E=2, 7 formed out, E=-2 formed in).
- (5) Brass hexagon lock nut M19x1.
- (6) Steel locking fork. To be inserted into the special groove to secure the lock to the panel.
- (7) Anti-rotation split washer in black-oxide treated steel.



Surface finish:

Smooth.

Colour:

- (1) Chromed.
- (3-4-6) Galvanised.

Rotation:

J131-O:

90° with clockwise closing movement.

J131-A:

90° with counterclockwise closing movement.

Special Requests:

Cams available for the locks with E=0:

L=30 (J131019.ZN30X20O - J131019.ZN30X20A),


L=41 (J131019.ZN41X20O - J131019.ZN41X20A),

Cams available for the locks with E=2:

L=45 (J131019.ZE45X22O - J131019.ZE45X22A),

Cams available for the locks with E=7:

L=41 (J131019.ZE41X27O - J131019.ZE41X27A),

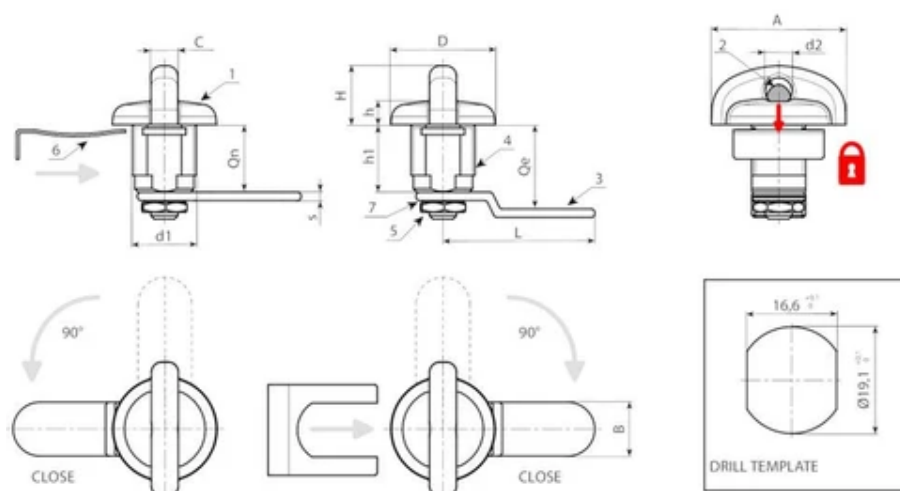

Version J131-O: with clockwise rotation.

Code	Art.	A	d	d2	D	L1	L	Q	E	F	G	H1	Ht	H	s	s1	Weight (g)
J131019.0004	J131019.ZN45X20O	8	M19	8	31,5	40	45	20	0	16	20,5	18	29	7	2	2,5	90
J131019.0002	J131019.ZE41X25O	8	M19	8	31,5	40	45	20	5	16	20,5	18	29	7	2	2,5	95

Version J131-A: with counterclockwise rotation.

Code	Art.	A	d	d2	D	L1	L	Q	E	F	G	H1	Ht	H	s	s1	Weight (g)
J131019.0003	J131019.ZN45X20A	8	M19	8	31,5	40	45	20	0	16	20,5	18	29	7	2	2,5	90
J131019.0001	J131019.ZE41X25A	8	M19	8	31,5	40	45	20	5	16	20,5	18	29	7	2	2,5	95