









LEVER TOGGLE LATCH

Chiusure a gancio con leva e manico

Materials:

- (1) Technopolymer handle. Resistant to oils and greases.
- (3) Sheared and bent steel lever system.
- (4) Hardened steel U-shaped hook with threaded ends.
- (5) Steel lock nut.
- (6) Steel self-locking nut.
- (7) Sheared and bent catch plate made of hardened steel.
- (8) Hardened steel rotary retainer bush, greased.
- (9) Stainless steel fixing rivets (Aisi 303).



(1) Light satin.

(3-4-5-6-7-8-9) Smooth.

Colour:

(1) Two-tone (red and black).

(3-4-5-6-7-8) Standard blue galvanising.

(9) Natural.

Packaging:

The code includes the toggle latch and its catch plate. The catch plate can also be ordered separately with the following codes:

J261010.FZ for toggle latch J260010.FZ

J261014.FZ for toggle latch J260014.FZ

J261025.FZ for toggle latch J260025.FZ


J261045.FZ for toggle latch J260045.FZ

Special Requests:

Upon request and for special quantities the product can be supplied in stainless steel.





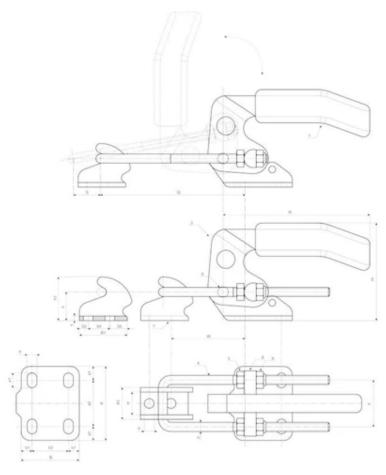

| Code | Art. | F1 (kN) | R | Н | S | Q | W | d | F | Α | A1 | a1 | a2 | В | В1 | b1 | b2 |
|--------------|------------|---------|-----|----|----|-----------|--------|-----|------|----|------|-----|----|----|----|------|------|
| J260010.0001 | J260010.FZ | 1 | 89 | 28 | 16 | 21÷65 | 14÷24 | 3.5 | 18.5 | 27 | 13.5 | 4.5 | 18 | 26 | 20 | 5 | 16 |
| J260014.0001 | J260014.FZ | 14 | 83 | 49 | 11 | 48÷86 | 32÷70 | 3.5 | 24 | 38 | 16 | 8 | 22 | 26 | 26 | 6.25 | 13.5 |
| J260025.0001 | J260025.FZ | 25 | 104 | 70 | 21 | 48,5÷95,5 | 43÷90 | 5 | 31 | 48 | 21 | 10 | 28 | 35 | 32 | 8 | 19 |
| J260045.0001 | J260045.FZ | 45 | 124 | 84 | 28 | 66÷104 | 60÷116 | 7 | 41 | 64 | 28 | 12 | 40 | 51 | 40 | 9.5 | 32 |

| Code | Art. | b3 | b4 | b5 | е | e1 | h | h1 | m | s | Weight (g) |
|--------------|------------|------|------|------|-----|-----|----|----|----|-----|------------|
| J260010.0001 | J260010.FZ | 5 | 10 | 5 | 4.5 | 4.5 | 12 | 18 | 9 | 2 | 80 |
| J260014.0001 | J260014.FZ | 7.75 | 10.5 | 7.75 | 5.2 | 7.5 | 12 | 20 | 11 | 2.5 | 150 |
| J260025.0001 | J260025.FZ | 6 | 14 | 12 | 6.5 | 10 | 19 | 29 | 15 | 3 | 330 |
| J260045.0001 | J260045.FZ | 8 | 19 | 13 | 8.5 | 13 | 25 | 39 | 20 | 4 | 750 |

