

16

KNURLED MOUNTING FOOT WITH FIXED THREADED STUD

Piedi con prigioniero fisso


Materials:
High density polyethylene.

Surface finish:
Satin.

Colour:
Black (RAL 9011).

Inserts:
Galvanised steel threaded stud (thread tolerance 6g).

Special requests:
Upon request and for special quantities inserts can be supplied with customised lengths (minimum quantity 10,000).

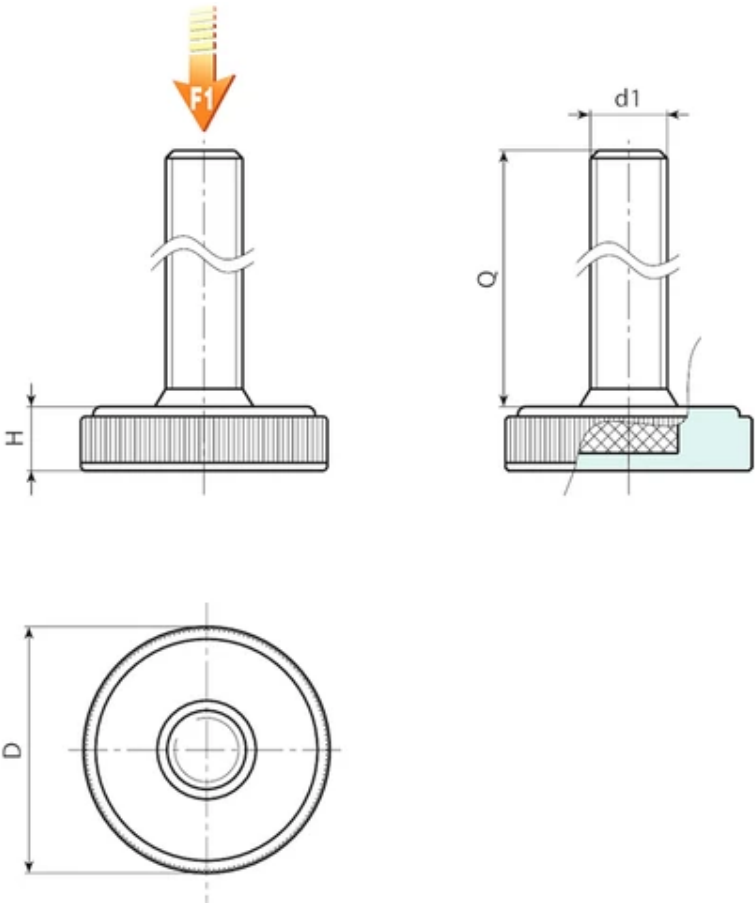

Code	Art.	D	H	d1 6g	Q	Weight (g)	F1 (N)
P20025.0001	P20025.TM06X1701	25	6	M6	17	7	1000
P20025.0002	P20025.TM08X2501	25	6	M8	25	14	1000
P20025.0003	P20025.TM10X3501	25	6	M10	35	25	1000

Code	Art.	D	H	d16g	Q	Weight (g)	F1 (N)
P20035.0001	P20035.TM08X2501	35	8	M8	25	18	1000
P20035.0002	P20035.TM10X2501	35	8	M10	25	25	1000
P20035.0005	P20035.TM10X4001	35	8	M10	40	32	1000
P20040.0001	P20040.TM10X3501	40	9	M10	35	35	1000
P20050.0001	P20050.TM10X3501	50	10	M10	35	40	1000
P20060.0001	P20060.TM10X3501	60	10.5	M10	35	50	1000

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.

Art.	D	H	d16g	Q	Weight (g)	F1 (N)
P20025.TM06X1701	25	6	M6	17	7	1000
P20025.TM08X2501	25	6	M8	25	14	1000
P20025.TM10X3501	25	6	M10	35	25	1000
P20035.TM08X2501	35	8	M8	25	18	1000
P20035.TM10X..01	35	8	M10	25-40	25-32	1000
P20040.TM10X3501	40	9	M10	35	35	1000
P20050.TM10X3501	50	10	M10	35	40	1000
P20060.TM10X3501	60	10.5	M10	35	50	1000