

16

FULL STEEL MOUNTING FOOT WITH ARTICULATED STEM TYPE A - BALL 24 AND NON-SLIP BASE

Piedi metallo con stelo snodato + antiscivolo

Materials:

P544:

Turned free-cutting steel mounting foot base.

P544CIN:

Turned stainless steel mounting foot base (Aisi 303).

Surface finish:

Smooth.

Colour:

P544:

Standard blue galvanising.

P544CIN:

Natural.

Inserts:

P544:

Galvanised steel threaded and articulated stem (ball 24) with hexagonal base (thread tolerance 6g).

P544CIN:

Stainless steel threaded and articulated stem (ball 24) with hexagonal base (Aisi 303) (thread tolerance 6g).

Stem fixing method:

The stem cannot be disassembled. The ball cannot be removed as the edge of its seat has been pressed in.

Non-slip base:


Non-slip base in thermoplastic rubber TPV 75 Shore, black RAL 9011.

Resistant to oils and greases. Push-fit assembly.

Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.



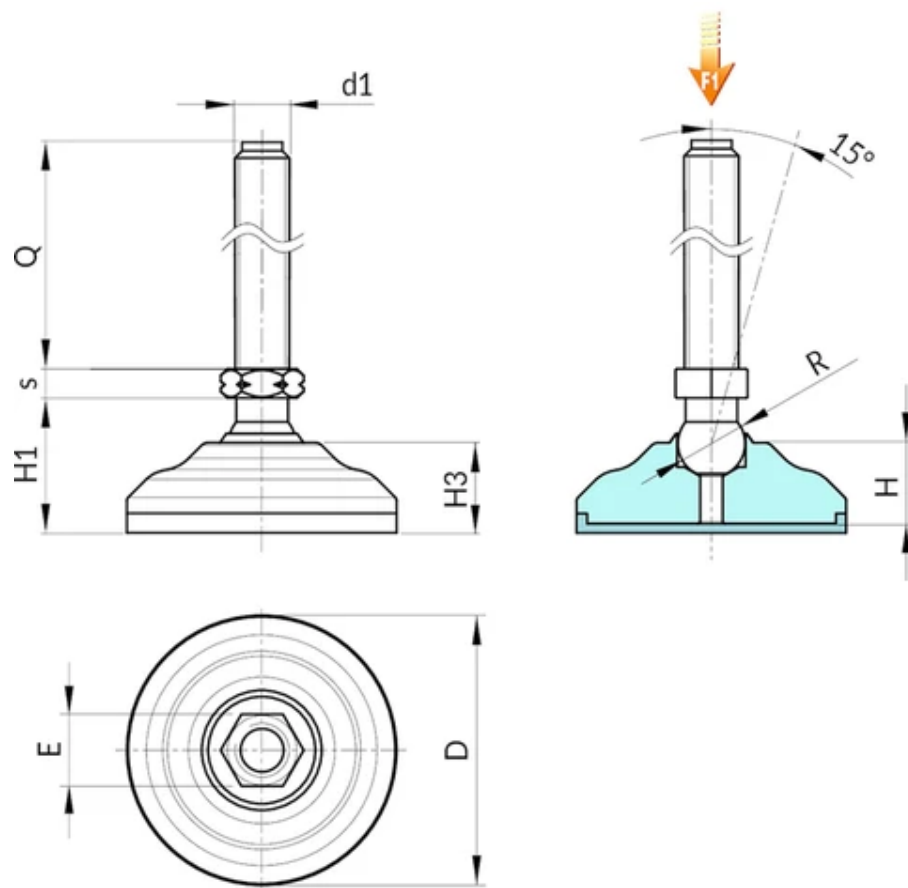

Version P544: Galvanised steel mounting foot with stem type A (with hexagonal base) and ball 24-with TPV non-slip base

Code	Art.	D	H	H1	H3	E	s	R	d1 6g	Q	Weight (g)	F1 (kN)
P54460.0011	P54460.VZM16X090	60	20	32	22,5	24	10	24	M16	90	-	60
P54460.0012	P54460.VZM16X110	60	20	32	22,5	24	10	24	M16	110	-	60
P54460.0013	P54460.VZM16X130	60	20	32	22,5	24	10	24	M16	130	-	60
P54460.0014	P54460.VZM16X150	60	20	32	22,5	24	10	24	M16	150	-	60
P54460.0015	P54460.VZM16X170	60	20	32	22,5	24	10	24	M16	170	-	60
P54460.0016	P54460.VZM20X090	60	20	32	22,5	24	10	24	M20	90	-	90
P54460.0017	P54460.VZM20X110	60	20	32	22,5	24	10	24	M20	110	-	90
P54460.0018	P54460.VZM20X130	60	20	32	22,5	24	10	24	M20	130	-	90
P54460.0019	P54460.VZM20X150	60	20	32	22,5	24	10	24	M20	150	-	90
P54460.0020	P54460.VZM20X170	60	20	32	22,5	24	10	24	M20	170	-	90

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.

Version P544CIN: Stainless steel mounting foot with stem type A (with hexagonal base) and ball 24-with TPV non-slip base

Code	Art.	D	H	H1	H3	E	s	R	d1 6g	Q	Weight (g)	F1_(kN)
P54460.0001	P54460.INM16X090CIN	60	20	32	22,5	24	10	24	M16	90	-	60
P54460.0002	P54460.INM16X110CIN	60	20	32	22,5	24	10	24	M16	110	-	60
P54460.0003	P54460.INM16X130CIN	60	20	32	22,5	24	10	24	M16	130	-	60
P54460.0004	P54460.INM16X150CIN	60	20	32	22,5	24	10	24	M16	150	-	60
P54460.0005	P54460.INM16X170CIN	60	20	32	22,5	24	10	24	M16	170	-	60

Code	Art.	D	H	H1	H3	E	s	R	d16g	Q	Weight (g)	F1_(kN)
P54460.0006	P54460.INM20X090CIN	60	20	32	22,5	24	10	24	M20	90	-	60
P54460.0007	P54460.INM20X110CIN	60	20	32	22,5	24	10	24	M20	110	-	60
P54460.0008	P54460.INM20X130CIN	60	20	32	22,5	24	10	24	M20	130	-	60
P54460.0009	P54460.INM20X150CIN	60	20	32	22,5	24	10	24	M20	150	-	60
P54460.0010	P54460.INM20X170CIN	60	20	32	22,5	24	10	24	M20	170	-	60

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.