

16 TEARDROP MOUNTING FOOT WITH GROUND FIXING AND STEEL ARTICULATED STEM TYPE A - BALL 15

Piedi plastica con fissaggio laterale-stelo snodato

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

P702:

Galvanised steel threaded and articulated stem (ball 15) with hexagonal base (thread tolerance 6g).

P702CIN:

Stainless steel threaded and articulated stem (ball 15) with hexagonal base (Aisi 303) (thread tolerance 6g).

Ground fixing:


Through hole obtained by moulding the plastic.

Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.

Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).



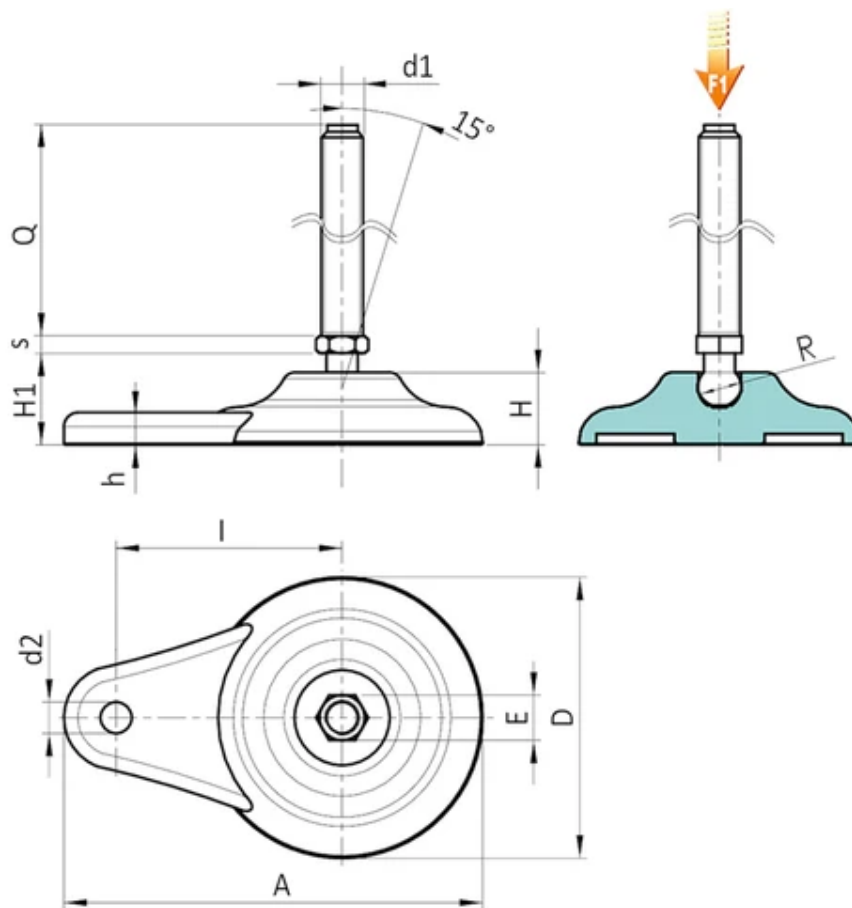

Version P702: Teardrop mounting foot with ground fixing - stem type A (with hexagonal base) and ball 15

Code	Art.	D	H	l	H1	h	A	E	s	d2	R	d1 6g	Q	Weight (g)	F1 (kN)
P702080.0001	P702080.TM12X5001	80	20	65	26	9	120	16	6.5	9	15	M12	50	120	13
P702080.0002	P702080.TM12X7001	80	20	65	26	9	120	16	6.5	9	15	M12	70	133	13
P702080.0004	P702080.TM12X9001	80	20	65	26	9	120	16	6.5	9	15	M12	90	148	13
P702080.0006	P702080.TM12X11001	80	20	65	26	9	120	16	6.5	9	15	M12	110	164	13
P702080.0008	P702080.TM14X5001	80	20	65	26	9	120	16	6.5	9	15	M14	50	132	13
P702080.0009	P702080.TM14X7001	80	20	65	26	9	120	16	6.5	9	15	M14	70	152	13
P702080.0010	P702080.TM14X9001	80	20	65	26	9	120	16	6.5	9	15	M14	90	173	13
P702080.0012	P702080.TM14X11001	80	20	65	26	9	120	16	6.5	9	15	M14	110	190	13
P702080.0015	P702080.TM14X15001	80	20	65	26	9	120	16	6.5	9	15	M14	150	224	13
P702080.0016	P702080.TM16X5001	80	20	65	26	9	120	16	6.5	9	15	M16	50	148	13
P702080.0019	P702080.TM16X7001	80	20	65	26	9	120	16	6.5	9	15	M16	70	174	13
P702080.0021	P702080.TM16X9001	80	20	65	26	9	120	16	6.5	9	15	M16	90	200	13
P702080.0024	P702080.TM16X11001	80	20	65	26	9	120	16	6.5	9	15	M16	110	225	13
P702080.0026	P702080.TM16X13001	80	20	65	26	9	120	16	6.5	9	15	M16	130	251	13
P702080.0028	P702080.TM16X15001	80	20	65	26	9	120	16	6.5	9	15	M16	150	276	13
P702080.0030	P702080.TM16X17001	80	20	65	26	9	120	16	6.5	9	15	M16	170	304	13
P702080.0032	P702080.TM16X19001	80	20	65	26	9	120	16	6.5	9	15	M16	190	327	13

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.

Art.	D	H	I	H1	h	A	E	s	d2	R	d1 6g	Q	Weight (g)	(
P702080.TM12X.. 01	80	20	65	26	9	120	16	6.5	9	15	M12	50-70-90-110	120-133-148-164	
P702080.TM14X.. 01	80	20	65	26	9	120	16	6.5	9	15	M14	50-70-90-110-150	132-152-173-190-224	
P702080.TM16X.. 01	80	20	65	26	9	120	16	6.5	9	15	M16	50-70-90-110-130-150-170-190	148-174-200-225-251-276-304-327	

Version P702CIN: Teardrop mounting foot with ground fixing - stem type A - stainless steel - (with hexagonal base) and ball 15

Code	Art.	D	H	I	H1	h	A	E	s	d2	R	d1 6g	Q	Weight (g)	F1 (kN)
P702080.0003	P702080.TM12X7001CIN	80	20	65	26	9	120	16	6.5	9	15	M12	70	133	13
P702080.0005	P702080.TM12X9001CIN	80	20	65	26	9	120	16	6.5	9	15	M12	90	148	13
P702080.0007	P702080.TM12X11001CIN	80	20	65	26	9	120	16	6.5	9	15	M12	110	164	13
P702080.0010	P702080.TM14X7001CIN	80	20	65	26	9	120	16	6.5	9	15	M14	70	152	13
P702080.0013	P702080.TM14X11001CIN	80	20	65	26	9	120	16	6.5	9	15	M14	110	190	13
P702080.0014	P702080.TM14X13001CIN	80	20	65	26	9	120	16	6.5	9	15	M14	130	207	13
P702080.0018	P702080.TM16X5001CIN	80	20	65	26	9	120	16	6.5	9	15	M16	50	148	13
P702080.0020	P702080.TM16X7001CIN	80	20	65	26	9	120	16	6.5	9	15	M16	70	174	13
P702080.0022	P702080.TM16X9001CIN	80	20	65	26	9	120	16	6.5	9	15	M16	90	200	13
P702080.0025	P702080.TM16X11001CIN	80	20	65	26	9	120	16	6.5	9	15	M16	110	225	13
P702080.0027	P702080.TM16X13001CIN	80	20	65	26	9	120	16	6.5	9	15	M16	130	251	13
P702080.0029	P702080.TM16X15001CIN	80	20	65	26	9	120	16	6.5	9	15	M16	150	276	13
P702080.0031	P702080.TM16X17001CIN	80	20	65	26	9	120	16	6.5	9	15	M16	170	304	13
P702080.0033	P702080.TM16X19001CIN	80	20	65	26	9	120	16	6.5	9	15	M16	190	327	13

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.

Code	Art.	D	H	I	H1	h	A	E	s	d2	R	d1 6g	Q	Weight (g)
-	P702080.TM12X.. 01CIN	80	20	65	26	9	120	16	6.5	9	15	M12	70-90-110	133-148-164
-	P702080.TM14X.. 01CIN	80	20	65	26	9	120	16	6.5	9	15	M14	70-110-130	152-190-207
-	P702080.TM16X.. 01CIN	80	20	65	26	9	120	16	6.5	9	15	M16	50-70-90-110-130-150-170-190	148-174-200-225-251-276-304