

16

SMALL MOUNTING FOOT WITH STEEL ARTICULATED STEM TYPE A - BALL 12.4

Piedi in plastica - stelo snodato

Materials:

Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

P900:

Galvanised steel threaded and articulated stem (ball 12.4) with hexagonal base (thread tolerance 6g).

P900CIN:


Stainless steel threaded and articulated stem (ball 12.4) with hexagonal base (Aisi 303) (thread tolerance 6g).

Special requests:

Upon request and for special quantities inserts can be supplied with customised lengths.

Upon request and for special quantities the foot can be supplied in Orange (RAL 2004).



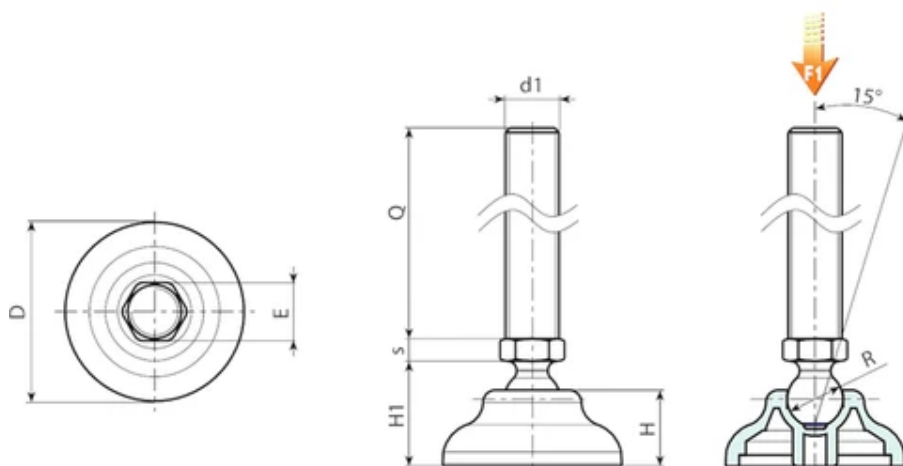

Version P900: Mounting foot with stem type A (with hexagonal base) and ball 12.4

Code	Art.	D	H	H1	E	s	R	d1 6g	Q	Weight (g)	F1 (kN)
P90040.0003	P90040.TM08X4501	40	17	23	13	5	12.4	M8	45	40	10
P90040.0005	P90040.TM08X7001	40	17	23	13	5	12.4	M8	70	47	10
P90040.0025	P90040.TM08X9001	40	17	23	13	5	12.4	M8	90	54	10
P90040.0013	P90040.TM10X4501	40	17	23	13	5	12.4	M10	45	48	10
P90040.0015	P90040.TM10X7001	40	17	23	13	5	12.4	M10	70	60	10
P90040.0007	P90040.TM10X10001	40	17	23	13	5	12.4	M10	100	75	10
P90040.0021	P90040.TM12X4501	40	17	23	13	5	12.4	M12	45	58	10
P90040.0023	P90040.TM12X7001	40	17	23	13	5	12.4	M12	70	75	10
P90040.0018	P90040.TM12X10001	40	17	23	13	5	12.4	M12	100	97	10
P90050.0002	P90050.TM08X4501	50	18	24	13	5	12.4	M8	45	46	10
P90050.0003	P90050.TM08X7001	50	18	24	13	5	12.4	M8	70	53	10
P90050.0011	P90050.TM10X4501	50	18	24	13	5	12.4	M10	45	54	10
P90050.0014	P90050.TM10X7001	50	18	24	13	5	12.4	M10	70	63	10
P90050.0006	P90050.TM10X10001	50	18	24	13	5	12.4	M10	100	77	10
P90050.0019	P90050.TM12X4501	50	18	24	13	5	12.4	M12	45	64	10
P90050.0021	P90050.TM12X7001	50	18	24	13	5	12.4	M12	70	78	10
P90050.0016	P90050.TM12X10001	50	18	24	13	5	12.4	M12	100	99	10
P90060.0004	P90060.TM08X4501	60	20	26	13	5	12.4	M8	45	58	10
P90060.0005	P90060.TM08X7001	60	20	26	13	5	12.4	M8	70	66	10
P90060.0010	P90060.TM10X4501	60	20	26	13	5	12.4	M10	45	68	10
P90060.0013	P90060.TM10X7001	60	20	26	13	5	12.4	M10	70	80	10

Code	Art.	D	H	H1	E	s	R	d1 6g	Q	Weight (g)	F1 (kN)
P90060.0006	P90060.TM10X10001	60	20	26	13	5	12.4	M10	100	95	10
P90060.0022	P90060.TM12X4501	60	20	26	13	5	12.4	M12	45	78	10
P90060.0023	P90060.TM12X7001	60	20	26	13	5	12.4	M12	70	96	10
P90060.0018	P90060.TM12X10001	60	20	26	13	5	12.4	M12	100	117	10

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.

Version P900CIN: Mounting foot with stem type A (with hexagonal base) and ball 12.4 - stainless steel !da duplicazione!

Code	Art.	D	H	H1	E	s	R	d1 6g	Q	Weight (g)	F1 (kN)
P90040.0004	P90040.TM08X4501CIN	40	17	23	13	5	12.4	M8	45	40	10
P90040.0006	P90040.TM08X7001CIN	40	17	23	13	5	12.4	M8	70	47	10
P90040.0014	P90040.TM10X4501CIN	40	17	23	13	5	12.4	M10	45	48	10
P90040.0016	P90040.TM10X7001CIN	40	17	23	13	5	12.4	M10	70	60	10
P90040.0022	P90040.TM12X4501CIN	40	17	23	13	5	12.4	M12	45	58	10
P90040.0024	P90040.TM12X7001CIN	40	17	23	13	5	12.4	M12	70	75	10
P90040.0019	P90040.TM12X10001CIN	40	17	23	13	5	12.4	M12	100	99	10
P90050.0001	P90050.TM08X4501CIN	50	18	24	13	5	12.4	M8	45	46	10
P90050.0004	P90050.TM08X7001CIN	50	18	24	13	5	12.4	M8	70	53	10
P90050.0005	P90050.TM10X4501CIN	50	18	24	13	5	12.4	M10	45	54	10
P90050.0015	P90050.TM10X7001CIN	50	18	24	13	5	12.4	M10	70	63	10
P90050.0020	P90050.TM12X4501CIN	50	18	24	13	5	12.4	M12	45	64	10
P90050.0022	P90050.TM12X7001CIN	50	18	24	13	5	12.4	M12	70	78	10
P90050.0017	P90050.TM12X10001CIN	50	18	24	13	5	12.4	M12	100	102	10
P90060.0001	P90060.TM08X4501CIN	60	20	26	13	5	12.4	M8	45	58	10
P90060.0002	P90060.TM08X7001CIN	60	20	26	13	5	12.4	M8	70	66	10
P90060.0011	P90060.TM10X4501CIN	60	20	26	13	5	12.4	M10	45	68	10
P90060.0014	P90060.TM10X7001CIN	60	20	26	13	5	12.4	M10	70	80	10
P90060.0016	P90060.TM12X4501CIN	60	20	26	13	5	12.4	M12	45	78	10
P90060.0017	P90060.TM12X7001CIN	60	20	26	13	5	12.4	M12	70	96	10
P90060.0019	P90060.TM12X10001CIN	60	20	26	13	5	12.4	M12	100	120	10

Attention: The expressed load limit F1 is lower than the break load by 30% and is intended as static.
Customised stud length available for a minimum of 100 pieces.