

R101CIN

INOX

max
4 Km/h

+80°
-25°

PA6

RoHS
COMPLIANT

18

POLYAMIDE MONOLITHIC WHEEL WITH ROUND STAINLESS STEEL SWIVEL SUPPORT AND SMOOTH THROUGH HOLE

Ruote in Nylon monolitico

Materials:

Wheel body (1):

Polyamide. Resistant to oils and greases.

Tread (2):

Polyamide. Resistant to oils and greases.

Surface finish:

Smooth.

Colour:

(1-2) Natural white.

(3-4-5-6) Natural stainless steel.

Wheel rotation (4):

The hole for the pivot pin is formed by plastic moulding. A stainless steel (Aisi 304) tube is positioned between the stud and the hole for protection.

Bracket (3):

Stainless steel (Aisi 304) fork.

Rotating assembly (5):

Stainless steel (Aisi 304) rotating assembly with double stainless steel (Aisi 420) ball race and smooth fixing hole, (hole tolerance H7).


Wheel fastening (6):

Stainless steel (Aisi 304) hex head bolt, coupled with a stainless steel (Aisi 304) nut.

Special requests:

Upon request and for a minimum of 20 pieces, the wheel can be supplied with a needle roller cage, (replace code no. R101CIN with code no. R131CIN).



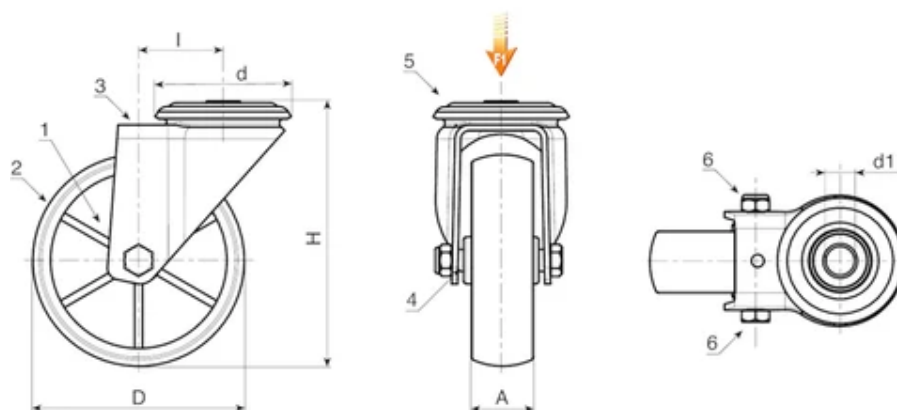

Code	art.	D	A	H	I	d	d1	H7	Weight (g)	F1 (Kg)
R101080.0002	R101080.T30D12CIN	80	30	108	32	64	12		340	100
R101100.0002	R101100.T30D12CIN	100	30	127	32	64	12		522	130
R101125.0002	R101125.T39D12CIN	125	39	155	32	64	12		513	130
R101150.0002	R101150.T40D12CIN	150	40	184	35	65	12		-	140
R101175.0002	R101175.T45D16CIN	175	45	228	48	95	16		-	300
R101200.0002	R101200.T50D16CIN	200	50	240	48	95	16		-	300