

## POLYAMIDE / POLYURETHANE WHEEL WITH RIGID STEEL FORK

Ruote in Nylon/Poliuretano

### Materials:

Wheel body (1):

Polyamide. Resistant to oils and greases.

Tread (2):

Injected polyurethane. Hardness  $60 \pm 5$  Shore D.

### Surface finish:

Smooth.

### Colour:

(1) Natural white.

(2) Red (Ral 3013).

(3-4-6) Galvanised blue.

### Wheel rotation (4):

The hole for the pivot pin is formed by plastic moulding. A galvanised steel tube is positioned between the stud and the hole for protection.

### Bracket (3):

Rigid steel (DD13) fork, with mounting holes in the base.


### Wheel fastening (6):

Steel hex head screw, coupled with a steel nut.

### Special requests:

Upon request and for a minimum of 20 pieces, the wheel can be supplied with a needle roller cage, (replace code no. R209 with code no. R239).



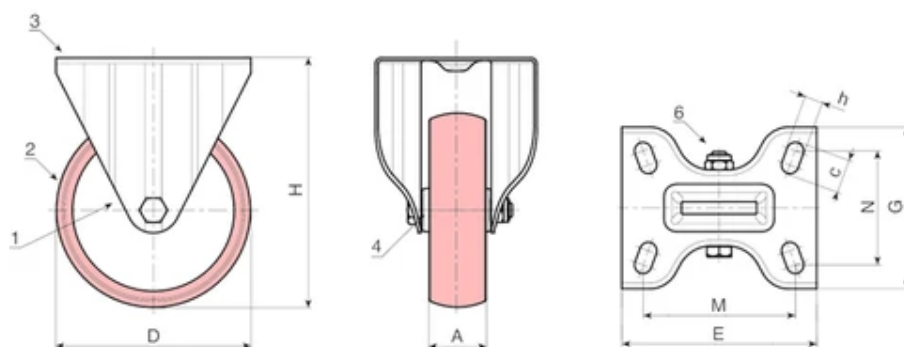

| Code         | art.                | D   | A  | H   | E   | G   | M   | N  | c  | h  | Weight (g) | F1 (Kg) |
|--------------|---------------------|-----|----|-----|-----|-----|-----|----|----|----|------------|---------|
| R209080.0001 | R209080.T30P080X060 | 80  | 30 | 108 | 100 | 84  | 80  | 60 | 12 | 9  | 379        | 100     |
| R209100.0001 | R209100.T30P080X060 | 100 | 30 | 127 | 100 | 84  | 80  | 60 | 12 | 9  | 436        | 130     |
| R209125.0001 | R209125.T35P080X060 | 125 | 35 | 155 | 100 | 84  | 80  | 60 | 12 | 9  | 685        | 180     |
| R209150.0001 | R209150.T40P080X060 | 150 | 40 | 184 | 100 | 84  | 80  | 60 | 12 | 9  | 577        | 140     |
| R209200.0001 | R209200.T50P105X080 | 200 | 50 | 240 | 135 | 110 | 105 | 80 | 23 | 11 | 1686       | 300     |