R250





PA6

PU





WHEEL WITH POLYAMIDE BODY AND INJECTED POLYURETHANE TREAD WITH BALL BEARINGS WITHOUT RIG (HEAVY DUTY SERIES)

Ruote in Nylon/Poliuretano

Materials:

Wheel body:

Polyamide. Resistant to oils and greases.

Tread:

Injected polyurethane. Hardness 60 ± 5 Shore D.

Surface finish:

Smooth.

Colour:

Body:

Natural white.

Tread:

Red (Ral 3013).

Wheel rotation:


(1) A pair of steel ball bearings is inserted in the wheel hub to provide excellent rollability under a heavy load.

Special requests:

Upon request and for a minimum of 20 pieces, the wheel can be supplied with a needle roller cage, (replace code no. R250 with code no. R240).





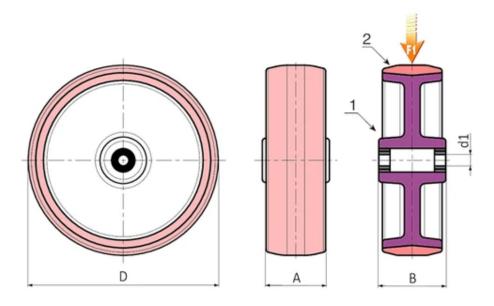

Code	art.	D	Α	В	d1	Weight (g)	F1 (Kg)
R250080.0001	R250080.T34D12	80	34	40	12	-	260
R250100.0001	R250100.T40D15	100	40	44	15	-	300
R250125.0001	R250125.T40D15	125	40	45	15	-	400
R250150.0001	R250150.T45D20	150	45	58	20	-	600
R250200.0001	R250200.T50D20	200	50	58	20	-	750

