

20 ALUMINIUM TANK PLUG WITH MAGNET (RESISTANT UP TO 200 °C)

Tappi per prodotti Boteco

Materials:

- (1) Aluminium plug (alloy 6060).
- (4) Neodymium magnet -NdFeB- (N35EH) resistant up to 200°C.
- (2) Punched "MAGNETIC" writing resistant up to 200°C.
- (3) Gasket in fluoroelastomer (VITON®) resistant up to 200°C.

Surface finish:

Turned.


Colour:

Natural.

Special requests:

Upon request and for special quantities writings can be supplied to customer's drawing.

Upon request and for special quantities thread d1 can be supplied to customer's drawing.

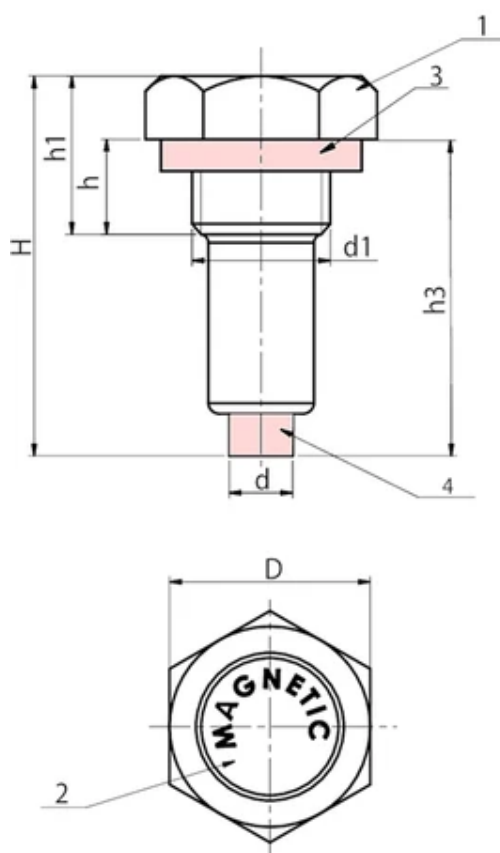

Version with GAS threads

Code	art.	D	d	H	h	h1	h3	d1 (GAS)	Weight (g)
T50119.0001	T50119.AT1-4	19	6	36	9	15	28	1/4	14
T50122.0001	T50122.AT3-8	22	8	36	9	15	30	3/8	21
T50126.0006	T50126.AT1-2	26	8	40	11	18	34	1/2	-
T50132.0001	T50132.AT3-4	32	8	44	12	20	36	3/4	-

Version with metric fine pitch

Code	art.	D	d	H	h	h1	h3	d1	Weight (g)
T50122.0006	T50122.AB16X1.5	22	8	36	9	15	30	M16X1,5	21
T50126.0005	T50126.AB20X1.5	26	8	40	11	18	34	M20X1,5	-
T50132.0006	T50132.AB27X1.5	32	8	44	12	20	36	M27X1,5	-