

KNOB WITH BLACK OXIDE TREATED STEEL PLUNGER AND FLANGE

Spintori con corpo liscio con fissaggi alternativi

Materials:

(3) Reinforced polyamide lobed knob. Cannot be disassembled.

Resistant to oils and greases.

Surface finish:

(3) Satin.

(1-2) Smooth.

Colour:

(3) Black (RAL 9011).

(1-2) Black-oxide treated.

Inserts:

(4) Stainless steel spring.

(1) Smooth steel body, with incorporated turned and bored flange.

(2) Hardened high resistance steel plunger pin.


ATTENTION:

> We recommend an H7 tolerance for the plunger stem bore.

Special Requests:

On request and for special quantities the knob can be supplied in the colours indicated in the table.



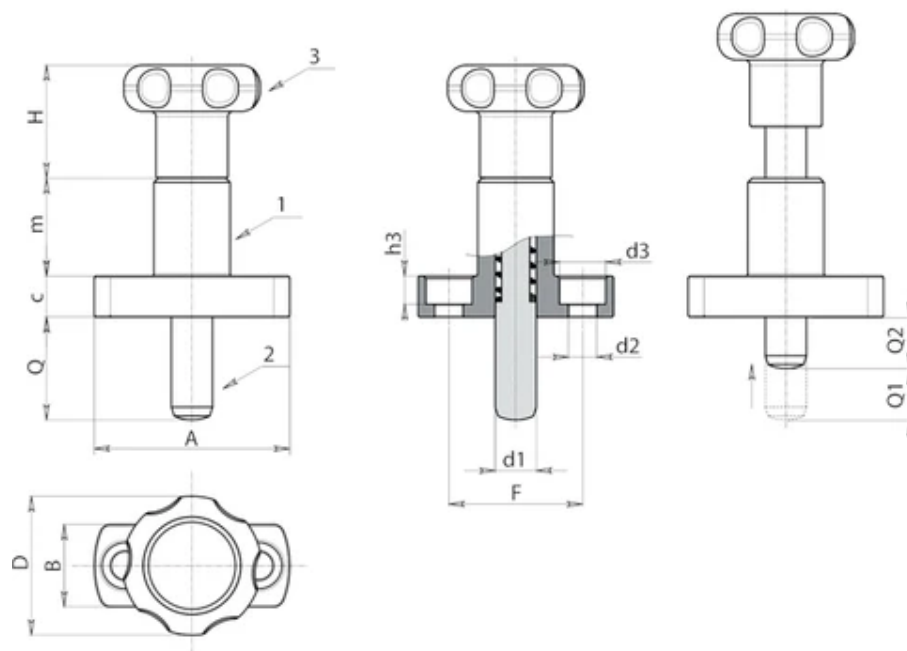

Code	Art.	D	H	m	c	A	B	F	h3	d2	d3	d1-0,02-0,04	Q	Q1	Q2	Weight (g)
W790027.0001	W790027.Q08X2001	27	22	19	8	38	16	26	5.5	5.5	9	8	20	10	10	74
W790027.0002	W790027.Q08X2601	27	22	19	8	38	16	26	5.5	5.5	9	8	26	10	16	75
W790027.0004	W790027.Q10X2401	27	22	19	8	38	16	26	5.5	5.5	9	10	24	12	12	75
W790027.0006	W790027.Q10X3201	27	22	19	8	38	16	26	5.5	5.5	9	10	32	12	20	76