

STEEL INDEXING PLUNGER WITH RING - WITH NUT

Spintori filettati passo grosso - senza pomello

Materials:

- (1) Stainless steel plunger pin (Aisi 303).
- (3) Stainless steel spring (Aisi 302).
- (4) Harmonic stainless steel spring ring.

W798:

- (2) Indexing plunger body in free-cutting steel.
- (5) Threaded steel lock nut (UNI 5589).

W798 CIN:

- (2) Stainless steel (Aisi 303) indexing plunger body.
- (5) Threaded stainless steel lock nut (Aisi 304) (UNI 5589).

Surface finish:

W798:

- (2-5) Galvanised.
- (1-4) Natural.

W798 CIN:

- (1-2-4-5) Natural.


ATTENTION:

- > We recommend an H7 tolerance for the plunger stem bore.
- > The nut is supplied assembled.

Special Requests:

On request the nut can be supplied disassembled.



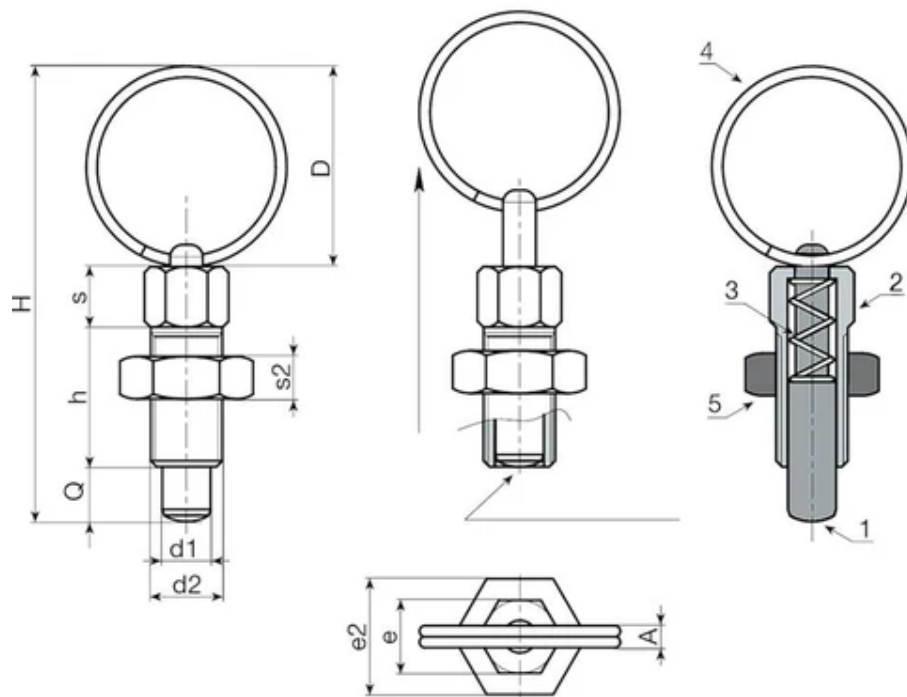

Version W798 - galvanised steel

Code	Art.	D	H	h	A	e	s	d2	e2	s2	d1 -0,02 -0,04	Q	Weight (g)
W798.0001	W798.J04	15	35.5	12	2	6	4.5	M6	10	4	4	4	7
W798.0003	W798.J05	19	46	16	2.5	8	6	M8	13	5	5	5	16
W798.0005	W798.J06	27	60.5	20	3	10	7.5	M10	17	6	6	6	31
W798.0007	W798.J08	33	75	24	3.5	12	9	M12	19	7	8	8	50

Version W798 CIN - stainless steel (Aisi 303)

Code	Art.	D	H	h	A	e	s	d2	e2	s2	d1 -0,02 -0,04	Q	Weight (g)
W798.0002	W798.J04CIN	15	35.5	12	2	6	4.5	M6	10	4	4	4	7
W798.0004	W798.J05CIN	19	46	16	2.5	8	6	M8	13	5	5	5	16
W798.0006	W798.J06CIN	27	60.5	20	3	10	7.5	M10	17	6	6	6	31
W798.0008	W798.J08CIN	33	75	24	3.5	12	9	M12	19	7	8	8	50