

KNOB WITH STEEL INDEXING PLUNGER WITHOUT RING NUT - WITH LOCK NUT

Spintori filettati passo fine - con pomello

Materials:

- (3) Stainless steel spring (Aisi 301).
- (4) Reinforced polyamide lobed knob. Cannot be disassembled. Resistant to oils and greases.

W805:

- (2) Threaded high-resistance steel body with seat for key.
- (1) Hardened high resistance steel plunger pin.
- (5) Threaded steel lock nut (UNI 5589).

W805CIN:

- (2) Threaded stainless steel body (Aisi 303), with seat for key.
- (1) Stainless steel plunger pin (Aisi 303).
- (5) Threaded stainless steel lock nut (Aisi 304) (UNI 5589).

Surface finish:

- (4) Satin.
- (1-2-5) Smooth.

Colour:

- (4) Black (RAL 9011).

W805:

- (1-2) Black-oxide treated.

W805CIN:

- (1-2) Natural.

Locking key:

Upon request the locking key with article code W807 is available.

ATTENTION:


- > We recommend an H7 tolerance for the plunger stem bore.
- > The nut is supplied assembled.


Special Requests:

On request and for special quantities the knob can be supplied in the colours indicated in the table.

Upon request locking keys are available.

On request the nut can be supplied disassembled.

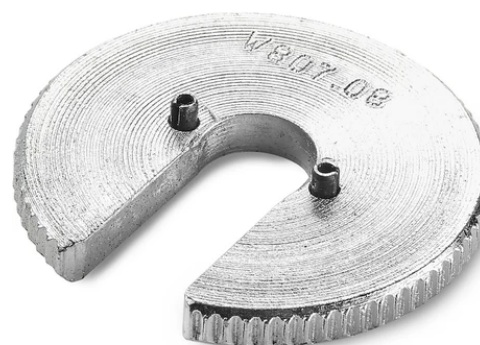

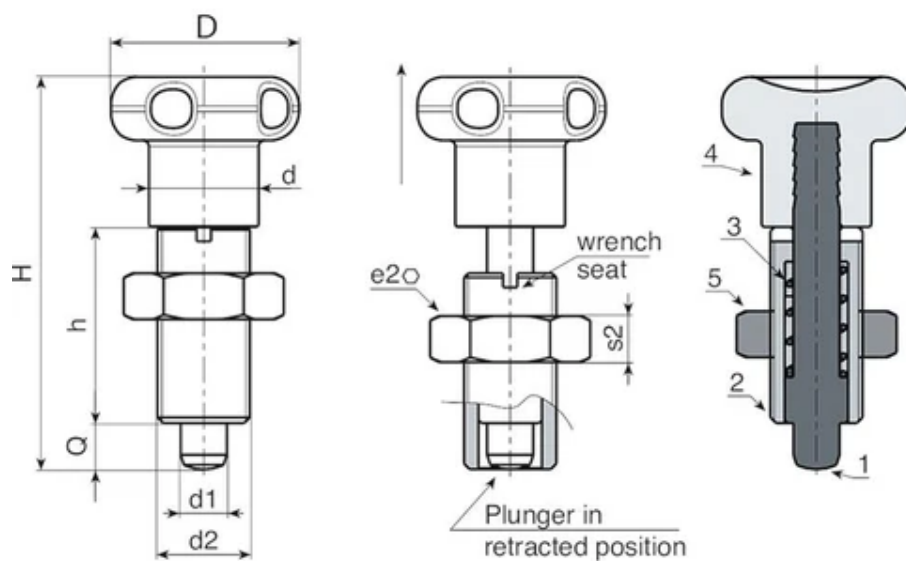

Version W805 - black-oxide treated steel

Code	Art.	D	H	h	d2	d	e2	s2	d1 -0,02-0,04	Q	Weight (g)	Key
W805.0006	W805.Q0501	22	45	22	M10x1	12	17	6	5	5	23	W807.05
W805.0008	W805.Q0601	27	54	26	M12x1,5	14	19	7	6	6	38	W807.06
W805.0009	W805.Q0801	33	68	34	M16x1,5	19	24	8	8	8	82	W807.08
W805.0011	W805.Q1001	33	79	43	M20x1,5	19	30	9	10	10	133	W807.10

Version W805 CIN - stainless steel (Aisi 303)

Code	Art.	D	H	h	d2	d	e2	s2	d1 -0,02-0,04	Q	Weight (g)	Key
W805.0001	W805.I0501CIN	22	45	22	M10x1	12	17	6	5	5	23	W807.05
W805.0002	W805.I0601CIN	27	54	26	M12x1,5	14	19	7	6	6	38	W807.06
W805.0003	W805.I0801CIN	33	68	34	M16x1,5	19	24	8	8	8	82	W807.08
W805.0005	W805.I1001CIN	33	79	43	M20x1,5	19	30	9	10	10	133	W807.10