# W806



PA6 +G.F. C40





# KNOB WITH SMOOTH WELDABLE BLACK OXIDE TREATED STEEL PLUNGER

Spintori con corpo liscio con fissaggi alternativi

#### **Materials:**

(4) Reinforced polyamide lobed knob.

Resistant to oils and greases.

## Surface finish:

(4) Satin.

(1-2) Smooth.

#### Colour:

(4) Black (RAL 9011).

(1-2) Black-oxide treated.

## Inserts:

- (3) Galvanised steel spring.
- (2) Smooth bored body in weldable steel.
- (1) Hardened high resistance steel plunger pin.

# **ATTENTION:**

 $\,>\,$  We recommend an H7 tolerance for the plunger stem bore.

# **Special Requests:**


On request and for special quantities the knob can be supplied in the colours indicated in the table.

#### ATTENTION:

To avoid problems when welding the steel body to the machinery, the plastic knob is supplied disassembled. Screw in the knob once the part has cooled down.





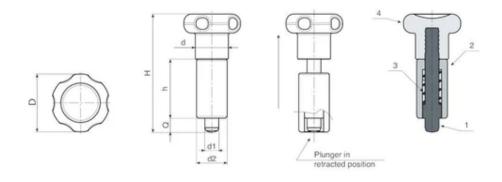

Code	Art.	D	Н	h	d2	d	d1 -0,02 -0,04	Q	Weight (g)
W806.0001	W806.Q0501	22	45	22	12	12	5	5	23
W806.0002	W806.Q0601	27	54	26	14	14	6	6	40
W806.0003	W806.Q0801	33	68	34	18	19	8	8	84

