

## KNOB WITH LOCKING STEEL INDEXING PLUNGER - WITH LOCK NUT

Spintori filettati passo fine - con pomello

### Materials:

- (3) Stainless steel spring (Aisi 301).
- (4) Reinforced polyamide lobed knob. Cannot be disassembled. Resistant to oils and greases.

### W811:

- (2) Threaded high-resistance steel hexagon ring nut.
- (1) Hardened high resistance steel plunger pin.
- (5) Threaded steel lock nut (UNI 5589).

### W811 CIN:

- (2) Threaded stainless steel hexagon ring nut (Aisi 303).
- (1) Stainless steel plunger pin (Aisi 303).
- (5) Threaded stainless steel lock nut (Aisi 304) (UNI 5589).

### Surface finish:

- (4) Satin.
- (1-2-5) Smooth.

### Colour:

- (4) Black (RAL 9011).

### W811:

- (1-2-5) Black-oxide treated.

### W811 CIN:

- (1-2-5) Natural.

### ATTENTION:


- > We recommend an H7 tolerance for the plunger stem bore.
- > The nut is supplied assembled.

### Special Requests:

On request and for special quantities the knob can be supplied in the colours indicated in the table.

On request the nut can be supplied disassembled.



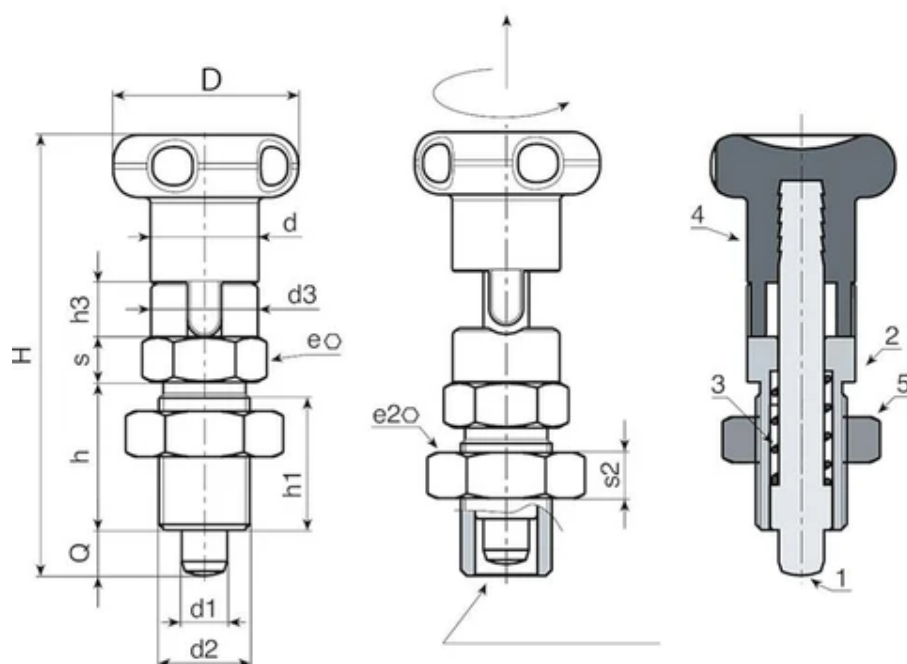

#### Version W811 - black-oxide treated steel

| Code      | Art.       | D  | H    | h  | h1 | h3   | d3   | d2      | d  | e  | s  | e2 | s2 | d1-0,02-0,04 | Q  | Weight (g) |
|-----------|------------|----|------|----|----|------|------|---------|----|----|----|----|----|--------------|----|------------|
| W811.0006 | W811.Q0501 | 22 | 51.5 | 17 | 15 | 6.5  | 11.8 | M10x1   | 12 | 12 | 5  | 17 | 6  | 5            | 5  | 29         |
| W811.0007 | W811.Q0601 | 27 | 61.5 | 20 | 18 | 7.5  | 13.8 | M12x1,5 | 14 | 14 | 6  | 19 | 7  | 6            | 6  | 47         |
| W811.0008 | W811.Q0801 | 33 | 77.5 | 26 | 23 | 9.5  | 18.8 | M16x1,5 | 19 | 19 | 8  | 24 | 8  | 8            | 8  | 105        |
| W811.0009 | W811.Q1001 | 33 | 90.5 | 33 | 30 | 11.5 | 18.8 | M20x1,5 | 19 | 22 | 10 | 30 | 9  | 10           | 10 | 172        |

#### Version W811 CIN - stainless steel (Aisi 303)

| Code      | Art.          | D  | H    | h  | h1 | h3   | d3   | d2      | d  | e  | s  | e2 | s2 | d1-0,02-0,04 | Q  | Weight (g) |
|-----------|---------------|----|------|----|----|------|------|---------|----|----|----|----|----|--------------|----|------------|
| W811.0001 | W811.I0501CIN | 22 | 51.5 | 17 | 15 | 6.5  | 11.8 | M10x1   | 12 | 12 | 5  | 17 | 6  | 5            | 5  | 29         |
| W811.0002 | W811.I0601CIN | 27 | 61.5 | 20 | 18 | 7.5  | 13.8 | M12x1,5 | 14 | 14 | 6  | 19 | 7  | 6            | 6  | 47         |
| W811.0003 | W811.I0801CIN | 33 | 77.5 | 26 | 23 | 9.5  | 18.8 | M16x1,5 | 19 | 19 | 8  | 24 | 8  | 8            | 8  | 105        |
| W811.0004 | W811.I1001CIN | 33 | 90.5 | 33 | 30 | 11.5 | 18.8 | M20x1,5 | 19 | 22 | 10 | 30 | 9  | 10           | 10 | 172        |