

KNOB WITH STEEL INDEXING PLUNGER AND LONG NOSE PIN

Spintori filettati passo fine - con pomello

Materials:

(3) Stainless steel spring (Aisi 301).

(4) Reinforced polyamide lobed knob. Cannot be disassembled.

Resistant to oils and greases.

W912:

(2) Threaded high-resistance steel hexagon ring nut.

(1) Hardened high resistance steel plunger pin.

W912CIN:

(2) Threaded stainless steel hexagon ring nut (Aisi 303).

(1) Stainless steel plunger pin (Aisi 303).



Surface finish:

(4) Satin.

(1-2-3) Smooth.

Colour:

(4) Black (RAL 9011).

W912:

(1-2) Black-oxide treated.

W912CIN:

(1-2) Natural.




ATTENTION:

> We recommend an H7 tolerance for the plunger stem bore.

Special Requests:

On request and for special quantities the knob can be supplied in the colours indicated in the table.

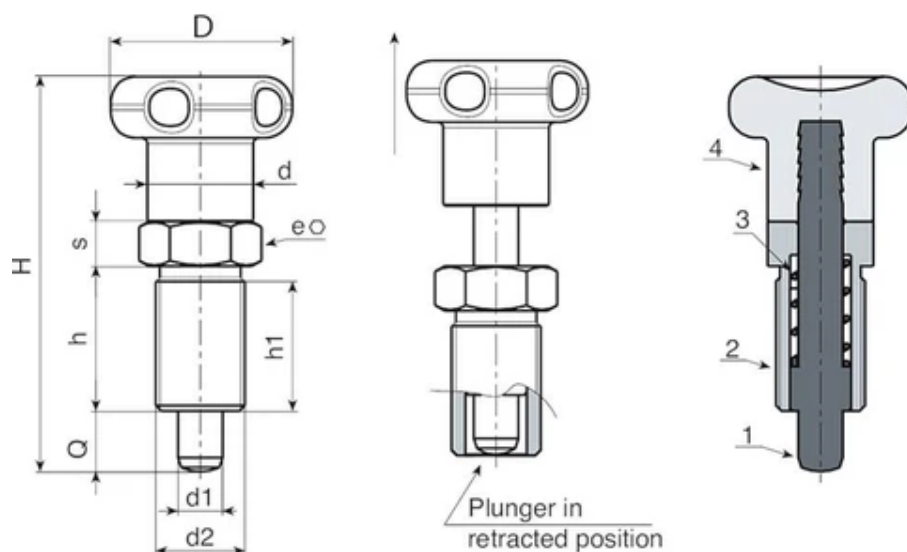

Version W912 - black-oxide treated steel

Code	Art.	D	H	h	h1	d2	d	e	s	d1 -0,02 -0,04	Q	Weight (g)
W912010.0001	W912010.Q05X0801	22	48	17	15	M10x1	12	12	5	5	8	19
W912012.0002	W912012.Q06X0901	27	57	20	18	M12x1,5	14	14	6	6	9	31
W912016.0004	W912016.Q08X1201	33	72	26	23	M16x1,5	19	19	8	8	12	73
W912016.0006	W912016.Q10X1201	33	72	26	23	M16x1,5	19	19	8	10	12	74
W912020.0001	W912020.Q12X1501	33	84	33	30	M20x1,5	19	22	10	12	15	128

Version W912 CIN - stainless steel (Aisi 303)

Code	Art.	D	H	h	h1	d2	d	e	s	d1 -0,02 -0,04	Q	Weight (g)
W912010.0002	W912010.I05X0801CIN	22	48	17	15	M10x1	12	12	5	5	8	19
W912012.0001	W912012.I06X0901CIN	27	57	20	18	M12x1,5	14	14	6	6	9	31
W912016.0005	W912016.I08X1201CIN	33	72	26	23	M16x1,5	19	19	8	8	12	73
W912016.0001	W912016.I10X1201CIN	33	72	26	23	M16x1,5	19	19	8	10	12	74
W912020.0002	W912020.I12X1501CIN	33	84	33	30	M20x1,5	19	22	10	12	15	128