

B219

DUROPLAST FIXED BRIDGE HANDLE WITH THREADED BORE INSERT

+170°
-20°

PF

UL94
HB

RoHS
COMPLIANT

Materials:
Phenolic resin.
Resistant to oils and greases.
Resistant to high temperatures.

Surface finish:
Glossy.

Colour:
Black (RAL 9011).

Inserts:
Brass insert with female threaded hole (thread tolerance 6H).


Special requests:
• None.



B219110 *



B219132
B219150

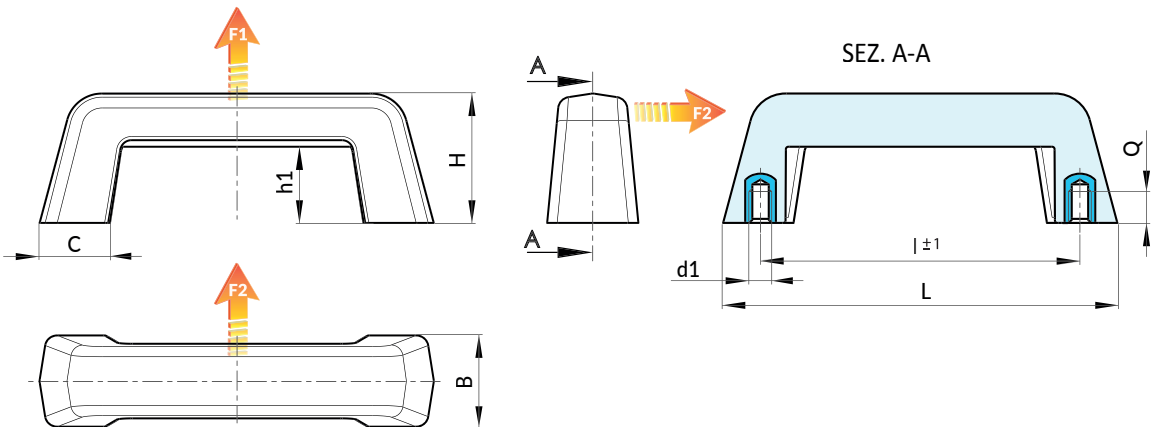

Code	art.	l	B	H	h1	C	d16H	Q	g	F1 (N)	F2 (N)
B219110.0001 *	B219110.BM0501	109 (+0 -1)	32	45	29	21	M5	10	94	800	500
B219110.0002 *	B219110.BM0601	109 (+0 -1)	32	45	29	21	M6	10	95	800	500
B219132.0001	B219132.BM0801	132 ± 1	38	56	34	30,5	M8	12	190	1500	850
B219132.0002	B219132.BM1001	132 ± 1	38	56	34	30,5	M10	18	193	1500	850
B219150.0001	B219150.BM0801	150 ± 1	40,5	61	43	35	M8	18	217	2000	1000
B219150.0002	B219150.BM1001	150 ± 1	40,5	61	43	35	M10	18	216	2000	1000