

T404

+60°
-20°

NdFeB

TPE

UL94
HB

RoHS
COMPLIANT



COATED NEODYMIUM ROUND DISC MAGNET - WITH FEMALE THREADED HOLE

Materials:
(1) Thermoplastic rubber TPE (75 Shore).
(2) Flat neodymium magnet (NdFeB).
(3) Turned galvanised steel base, with female threaded hole (thread tolerance 6H).

Surface finish:
Smooth.

Colour:
Black (RAL 9011 code 01).
White (RAL 9004 code 04).

Special requests:
• None.

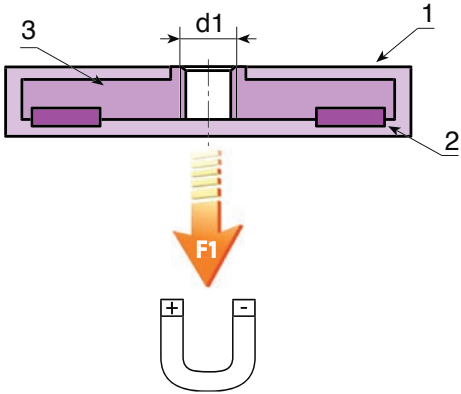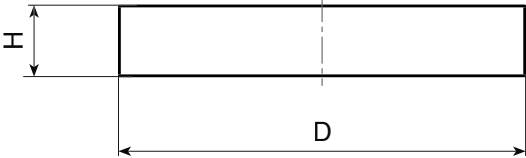

Black version (code 01)

Code	art.	D	H	d16H	g	F1(N)
T404018.0001	T404018.GM0401	18	6	M4	6	25
T404022.0001	T404022.GM0401	22	6	M4	9	38
T404031.0001	T404031.GM0501	31	6	M5	22	89
T404043.0001	T404043.GM0401	43	6	M4	30	100
T404057.0001	T404057.GM0501	57	7,5	M5	80	200
T404066.0001	T404066.GM0601	66	8,5	M6	105	250
T404088.0001	T404088.GM0601	88	8,5	M6	190	550

White version (code 04)

Code	art.	D	H	d16H	g	F1(N)
T404018.0002	T404018.GM0404	18	6	M4	6	25
T404022.0002	T404022.GM0404	22	6	M4	9	38
T404031.0002	T404031.GM0504	31	6	M5	22	89
T404043.0002	T404043.GM0404	43	6	M4	30	100
T404057.0001	T404057.GM0501	57	7,5	M5	80	200
T404066.0002	T404066.GM0604	66	8,5	M6	105	250
T404088.0002	T404088.GM0604	88	8,5	M6	190	550