

W695CIN

QUICK RELEASE KNOB DETENT PIN IN FULL STAINLESS STEEL



INOX

Materials:

- (1) Hardened stainless steel balls (Aisi 440C).
- (2) Stainless steel pin (Aisi 630), with high mechanical and chemical resistance, hardened (HRC 40).
- (4) Turned stainless steel knob (Aisi 303).
- (5) Stainless steel spring (Aisi 301).
- (6) Turned stainless steel button (Aisi 303).

Surface finish:

Natural with protective passivation.

Colour:


Natural.

ATTENTION:

> We recommend an H11 tolerance for the plunger stem bore.

Special Requests:

- None.

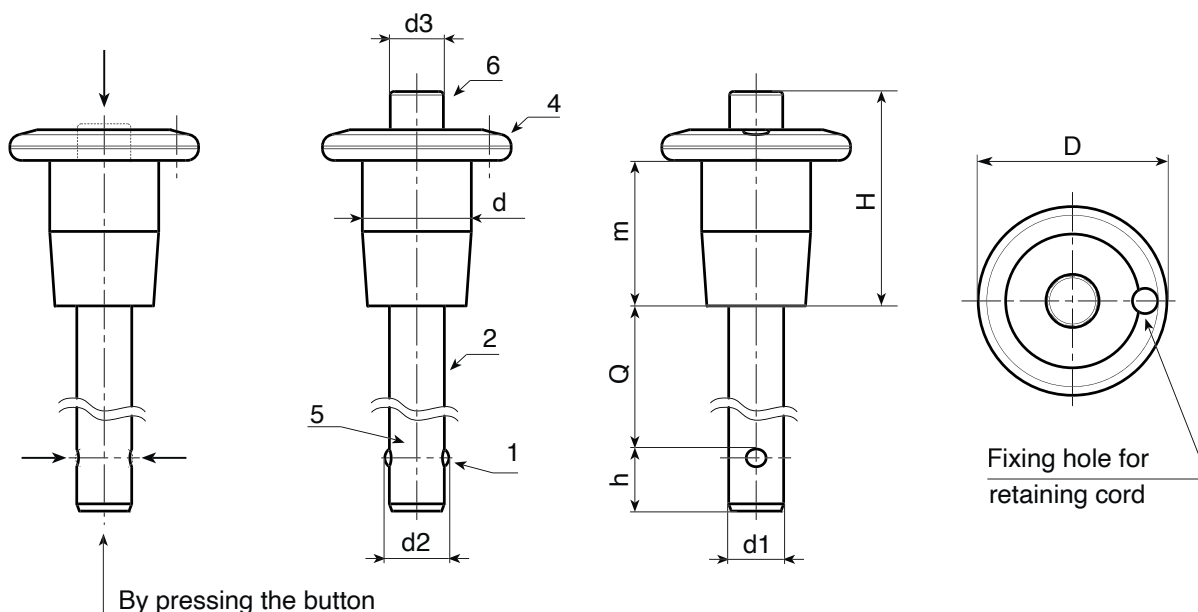

Code	Art.	D	H	m	d	d2(±0.25)	d3	d1 (-0,04 -0,08)	Q(+0.5)	h(±1)	g
W69521.0001	W69521.I05X10CIN	21	23,5	16	12	5,54	6	5	10	6	22
W69521.0002	W69521.I05X15CIN	21	23,5	16	12	5,54	6	5	15	6	23
W69521.0003	W69521.I05X20CIN	21	23,5	16	12	5,54	6	5	20	6	23
W69521.0004	W69521.I05X25CIN	21	23,5	16	12	5,54	6	5	25	6	24
W69521.0005	W69521.I05X30CIN	21	23,5	16	12	5,54	6	5	30	6	25
W69521.0006	W69521.I05X35CIN	21	23,5	16	12	5,54	6	5	35	6	25
W69521.0007	W69521.I05X40CIN	21	23,5	16	12	5,54	6	5	40	6	26
W69521.0008	W69521.I05X50CIN	21	23,5	16	12	5,54	6	5	50	6	28
W69521.0009	W69521.I05X60CIN	21	23,5	16	12	5,54	6	5	60	6	29

QUICK RELEASE KNOB DETENT PIN IN FULL STAINLESS STEEL



By pressing the button

22