

18

RUND MAGNET AF BELAGT NEODYM MED GEVINDSKÅRET TAP

Magneti ricoperti

Materialer:

- (1) Termoplastikgummi TPE (75 Shore).
- (2) Flad magnet af neodym (NdFeb).
- (3) Base af drejet forzinket stål, med gevindskåret tap, (gevindtolerance 6g).

Overflade:

Glat.


Farve:

- Sort (RAL 9011 kod. 01).
- Hvid (RAL 9004 kod. 04).

Andre muligheder:

Ingen.



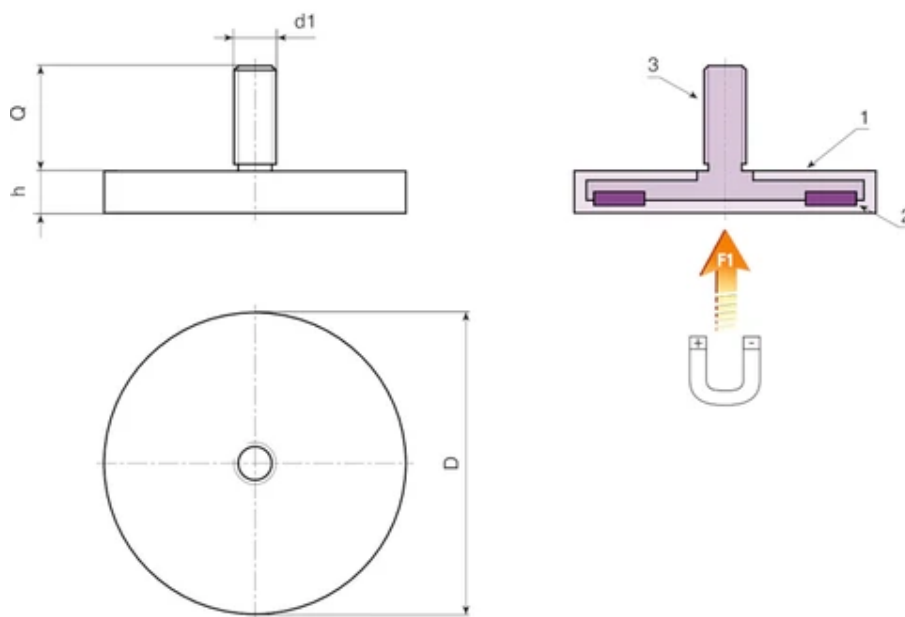

Version med sort farve (kode 01)

Kode	art.	D	h	d1 6g	Q	Weight (g)	F1 (N)
T401012.0001	T401012.GM04X0801	12	7	M4	08	4.5	13
T401018.0001	T401018.GM04X0601	18	6	M4	06	7.5	37
T401022.0001	T401022.GM04X6.501	22	6	M4	6.5	11	58
T401043.0001	T401043.GM06X1501	43	6	M6	15	32	100
T401066.0001	T401066.GM08X1501	66	8.5	M8	15	107	250
T401088.0001	T401088.GM08X1501	88	8.5	M8	15	193	550

Version med hvid farve (kode 04)

Kode	art.	D	h	d1 6g	Q	Weight (g)	F1 (N)
T401012.0002	T401012.GM04X0804	12	7	M4	08	4.5	13
T401018.0002	T401018.GM04X0604	18	6	M4	06	7.5	37
T401022.0002	T401022.GM04X6.504	22	6	M4	6.5	11	58
T401043.0002	T401043.GM06X1504	43	6	M6	15	32	100
T401066.0002	T401066.GM08X1504	66	8.5	M8	15	107	250
T401088.0002	T401088.GM08X1504	88	8.5	M8	15	193	550