


S602TG10



19 SPOOL HOLDER WITHOUT STUD FOR MIG/MAG WELDING WIRE COIL

Accessori bobine MIG

Materials:

(1-3-4-6) Reinforced polyamide.

Resistant to oils and greases.

Surface finish:

Satin.

Colour:

Black (RAL 9011).

Inserts:

(2) Galvanised steel spring.

(5) Galvanised steel insert with threaded holes.

(7) Thermoplastic TPV rubber washer, 75 Shore.


(8) Galvanised steel washer.




(9) Galvanised steel hexagon head screw, left-hand/right-hand thread. The choice must be made according to the motor rotation direction of the wire feeder.


Special requests:

For customers using spool holder S602116 who want to mount a wire coil with width $Q=55$, plastic adapter S604 can be provided upon request. To be ordered separately.

Upon request, adapter S816 can be supplied for metal coils without internal frame. To be ordered separately.

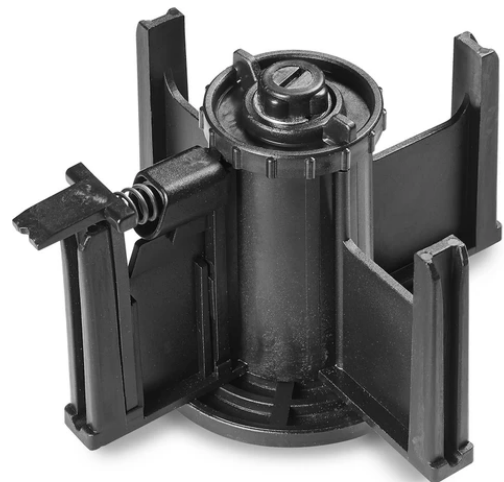

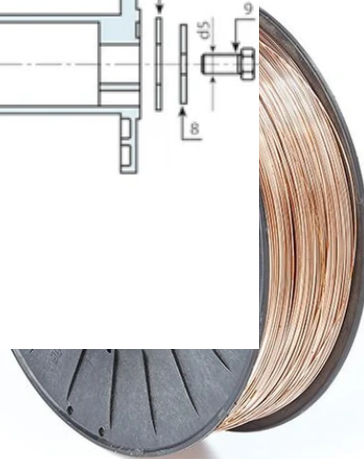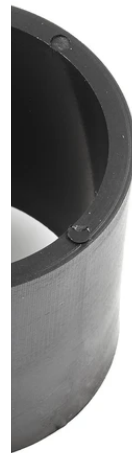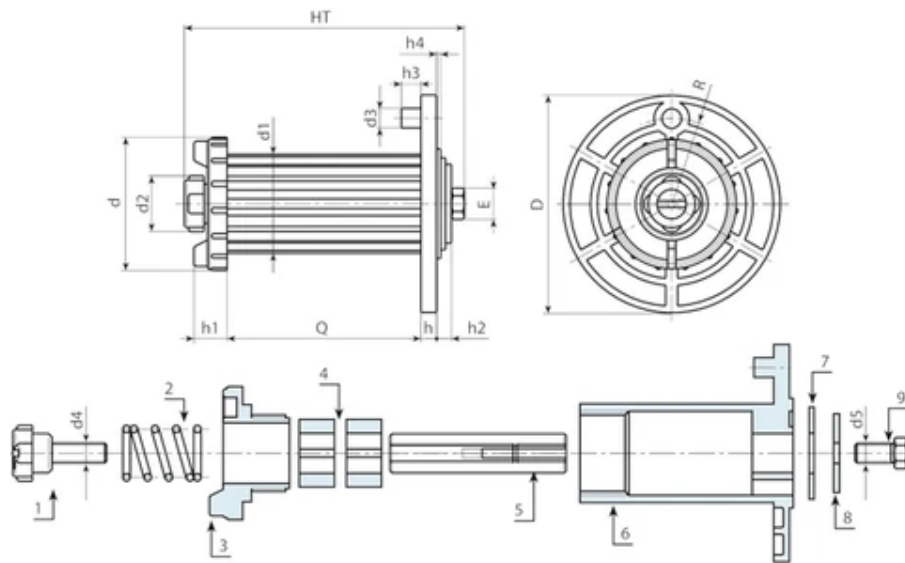

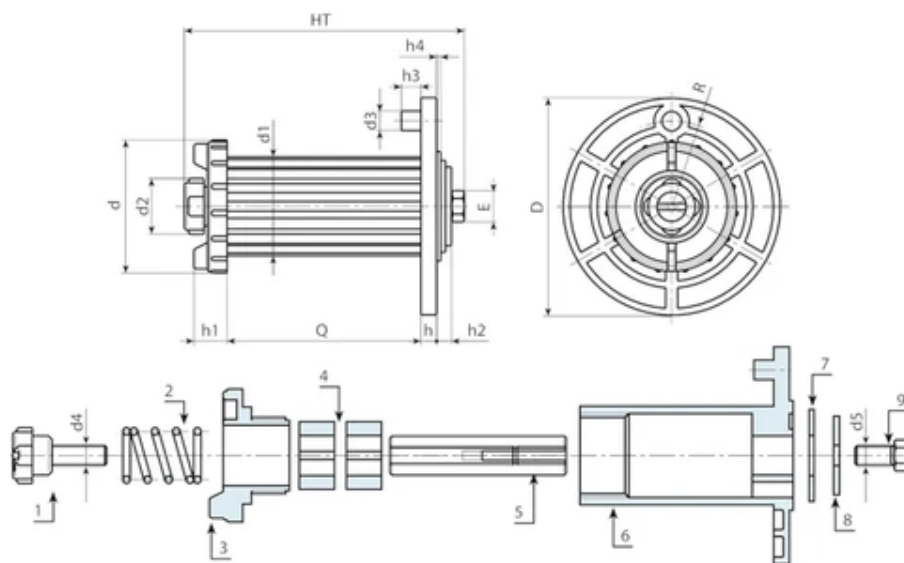

Version for plastic coil with hole: Ø 53 mm - width 55 mm (1/2)

Code	art.	D	HT	d	d1	d2	d3	d4	d5	h	h1	h2	h3	h4	E	Q	R
S602074.0001	S602074.TG10X1001DX	112	102	68	50.5	28	10	M10 DX	M10 DX	9	17	8	7	1.7	13	55	44
S602074.0002	S602074.TG10X1001SX	112	102	68	50.5	28	10	M10 DX	M10 SX	9	17	8	7	1.7	13	55	44

Code	art.	Weight (g)
S602074.0001	S602074.TG10X1001DX	350
S602074.0002	S602074.TG10X1001SX	350

Version for plastic coil with hole: Ø 53 mm - width 100 mm (1/2)

Code	art.	D	HT	d	d1	d2	d3	d4	d5	h	h1	h2	h3	h4	E	Q	R
S602116.0001	S602116.TG10X1001DX	112	140	68	50.5	28	10	M10 DX	M10 DX	9	17	8	7	1.7	17	99	44
S602116.0002	S602116.TG10X1001SX	112	140	68	50.5	28	10	M10 DX	M10 SX	9	17	8	7	1.7	17	99	44

Code	art.	Weight (g)
S602116.0001	S602116.TG10X1001DX	545
S602116.0002	S602116.TG10X1001SX	545