

## ALUMINIUM-NICKEL-COBALT CYLINDRICAL MAGNET WITH GALVANISED STEEL SHELL WITH FEMALE THREADED HOLE

Magneti (AlNiCo)

### Materials:

- (1) Turned free-cutting steel shell with female threaded hole (thread tolerance 6H).
- (2) Cylindrical aluminium-nickel-cobalt magnet (AlNiCo).
- (3) Brass spacer.

### Surface finish:



Smooth.

### Colour:

Standard blue galvanising.

### Special requests:

None.

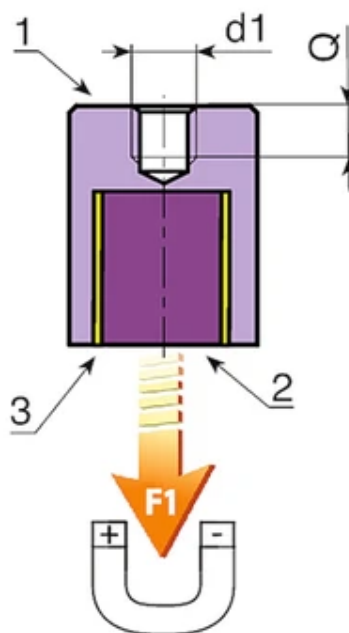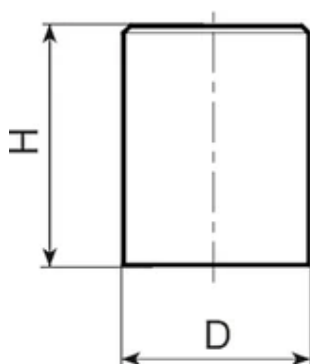

| Code         | art.          | D ±0,1 | H ±0,2 | d1 6H | Q | Weight (g) | F1 (N) |
|--------------|---------------|--------|--------|-------|---|------------|--------|
| T434006.0001 | T434006.VZM03 | 06     | 20     | M3    | 5 | 4          | 2      |
| T434008.0001 | T434008.VZM03 | 08     | 20     | M3    | 5 | 7,5        | 4      |
| T434010.0001 | T434010.VZM04 | 10     | 20     | M4    | 7 | 11         | 8,5    |

| Code         | art.          | D±0,1 | H±0,2 | d1 6H | Q  | Weight (g) | F1 (N) |
|--------------|---------------|-------|-------|-------|----|------------|--------|
| T434013.0001 | T434013.VZM04 | 13    | 20    | M4    | 7  | 19         | 12     |
| T434016.0001 | T434016.VZM04 | 16    | 20    | M4    | 5  | 30         | 20     |
| T434020.0001 | T434020.VZM06 | 20    | 25    | M6    | 7  | 55         | 40     |
| T434025.0001 | T434025.VZM06 | 25    | 35    | M6    | 9  | 121        | 60     |
| T434032.0001 | T434032.VZM08 | 32    | 40    | M8    | 9  | 220        | 160    |
| T434040.0001 | T434040.VZM08 | 40    | 50    | M8    | 12 | 436        | 240    |
| T434050.0001 | T434050.VZM10 | 50    | 60    | M10   | 12 | 794        | 400    |
| T434063.0001 | T434063.VZM12 | 63    | 65    | M12   | 14 | 1.274      | 660    |