

21

THREADED STEEL SPRING PLUNGER WITH HEXAGON SOCKET END AND NOSE PIN

Pressore a molla filettato con puntale

Materials:

W836:

Steel plunger body with property class 5.8.

W836CIN:

Stainless steel plunger body (Aisi 303).

Surface finish:

Smooth.

Colour:

W836:

Black-oxide treated.

W836CIN:

Natural.

Nose pin:

W836:

Turned hardened and black-oxide treated steel nose pin.

W836CIN:

Turned stainless steel nose pin (Aisi 303).

Spring:

W836:

Harmonic steel spring.

W836CIN:

Stainless steel spring (Aisi 301).


Type of spring thrust:

Normal.

Special requests:

None.



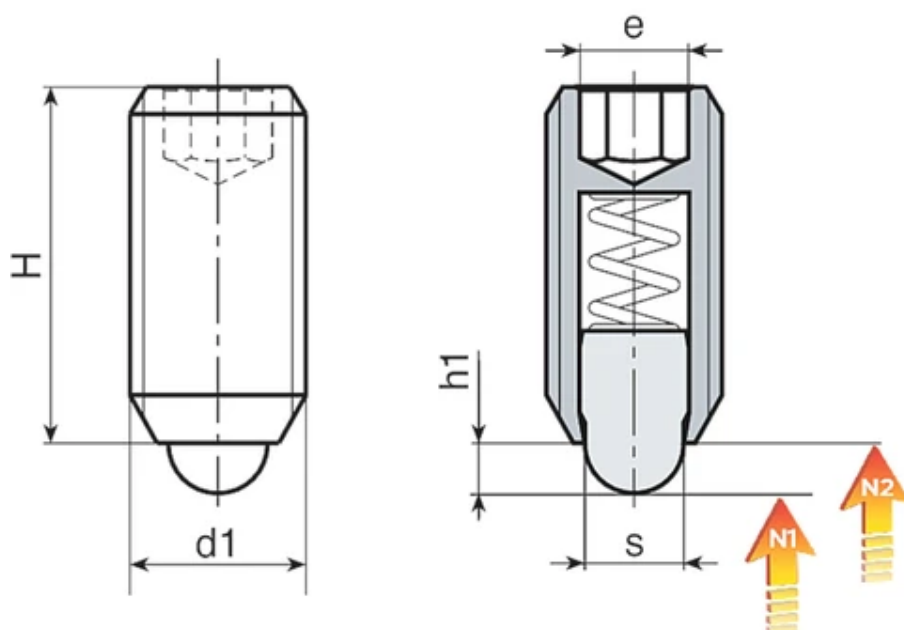

Version W836: black-oxide treated steel

Code	art.	s	H	h1	e	N1 (N)	N2 (N)	d1 6H	Weight (g)
W836.0010	W836.VBM04	1.8	12	1.5	2	4	12	M4	1
W836.0011	W836.VBM05	2.4	14	2	3	6	17	M5	1.1
W836.0012	W836.VBM06	2.7	15	2	3	7	18	M6	2
W836.0013	W836.VBM08	4	16	2	4	20	35	M8	4
W836.0014	W836.VBM10	4.5	23	2.5	5	20	45	M10	8
W836.0015	W836.VBM12	6	26	3.5	6	25	60	M12	12
W836.0016	W836.VBM16	8.5	33	4.5	8	50	95	M16	31
W836.0017	W836.VBM20	10	43	6.5	10	45	85	M20	64
W836.0018	W836.VBM24	13	48	8	12	72	155	M24	100

Version W836CIN - stainless steel (Aisi 303)

Code	art.	s	H	h1	e	N1 (N)	N2 (N)	d1 6H	Weight (g)
W836.0001	W836.INM04CIN	1.8	12	1.5	2	4	12	M4	1
W836.0002	W836.INM05CIN	2.4	14	2	3	6	17	M5	1.1
W836.0003	W836.INM06CIN	2.7	15	2	3	7	18	M6	2
W836.0004	W836.INM08CIN	4	16	2	4	20	35	M8	4
W836.0005	W836.INM10CIN	4.5	23	2.5	5	20	45	M10	8
W836.0006	W836.INM12CIN	6	26	3.5	6	25	60	M12	12
W836.0007	W836.INM16CIN	8.5	33	4.5	8	50	95	M16	31
W836.0008	W836.INM20CIN	10	43	6.5	10	45	85	M20	64

Code	art.	s	H	h1	e	N1 (N)	N2 (N)	d1 6H	Weight (g)
W836.0009	W836.INM24CIN	13	48	8	12	72	155	M24	100